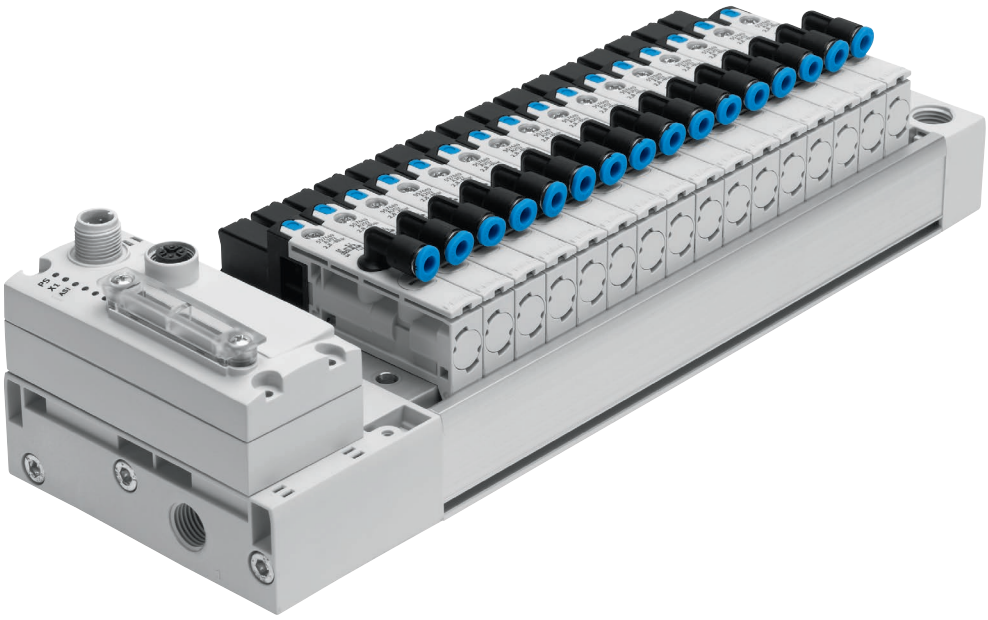
Fieldbus modules CTEU/Installation system CTEL



Key features



The system

- CTEU fieldbus modules for valve terminals
- Festo-specific interface (I-Port)
- Input modules CTSL for detecting sensor signals
- Interface for the Festo installation system CPI
- Direct and easy networking of valve terminals and other devices via a bus connection
- Wide range of applications thanks to high degree of protection to IP65/67
- Universal connection technology (Sub-D, M12, terminal strip)
- Optional decentralised installation of the bus node for connecting two valve terminals
- Basic diagnostics: undervoltage, short circuit

CTEU for the universal use of valve terminals. Thanks to the Festo-specific standardised definition of the interface (I-Port), the fieldbus modules can be used for different types of valve terminal.

The following protocols are currently supported:

- CANopen
- DeviceNet®
- CC-LINK®
- PROFIBUS
- EtherCAT®
- AS-Interface
- PROFINET
- EtherNet/IP
- VARAN
- Installation system CPI
- IO-Link®

Valve terminal configurator

Online via: ➔ www.festo.com

A valve terminal configurator is available online to help you select a suitable valve terminal.
Select a valve terminal with I-Port interface and order the relevant CTEU bus nodes. The bus nodes then only need to be placed on the valve terminal.
The ident. code for the valve terminals specifies the valve functions, the number of valves, the vacant valve positions as well as the additional functions and the type of compressed air supply.
As is the case with all Festo products, all valve terminals are supplied:

- Fully pre-assembled
- Equipped with fittings on request
- Tested for electrical functionality
- Tested for pneumatic functionality
- Securely packaged
- User documentation can be downloaded free of charge

Key features

Fieldbus systems with CTEU

CANopen
CANopen was originally developed for the automotive industry by a joint venture led by Bosch. It has been maintained by the organisation CiA (CAN in Automation) since 1995, and at the end of 2002 it was standardised as European standard EN 50325-4.

DeviceNet®
DeviceNet® is an open fieldbus standard that was developed by Rockwell Automation on the basis of the CAN protocol.
DeviceNet® is standardised in European standard EN 50325.

CC-LINK®
"Control and Communications Link" (CC-Link) was developed by Mitsubishi Electric and has been available as an open fieldbus network since 1999.

PROFIBUS
Process Field Bus (PROFIBUS) is a fieldbus that was developed by Siemens and has been standardised in the IEC 61158 series of international standards. It enables communication between devices without the need for any specific adaptations to the interface.

EtherCAT®
EtherCAT® is a bus with real-time capability; it was developed by Beckhoff and the EtherCAT Technology Group (ETG). EtherCAT® is an open technology and has been standardised in international standards IEC 61158 and IEC 61784 and in ISO 15745-4.

AS-Interface
AS-Interface is a manufacturer-independent, easy and sturdy installation system. It was developed and represented by the AS-International Association, a loose association of various companies from different sectors. AS-Interface has been standardised by IEC 620262 and EN 50295.

PROFINET
PROFINET by PROFIBUS and PROFINET International (PI) is the open industrial Ethernet standard for automation and is based on Ethernet TCP/IP and IT standards. PROFINET technology is developed by Siemens and the PROFIBUS user organisation.
PROFINET is standardised in IEC 61158 and IEC 61784.

EtherNet/IP
EtherNet/IP was developed by Allen-Bradley (Rockwell Automation) and the ODVA (Open DeviceNet Vendor Association). EtherNet/IP is an open standard (technology based on Ethernet TCP/IP and UDP/IP) for industrial networks and is standardised in the IEC 61158 series of international standards.

Installation system CPI
The CPI system is capable of meeting two completely different requirements and resolves the conflict between extensive decentralised modularisation and electrical installation.

VARAN
VARAN (Versatile Automation Random Access Network) is a real-time-capable Ethernet bus system that meets the highest requirements when it comes to flexibility and availability. It is an open bus system developed by Austrian company Sigmatek.

All CP valve terminals and CP modules are connected using a ready-to-install CP cable, and routed to the CP interface. Every 4 modules make up an installation string that ends at the CP interface.

IO-Link®
IO-Link® consists of a central master and the IO-Link® devices connected by special connecting cables. This permits a decentralised layout of the devices.

Key features

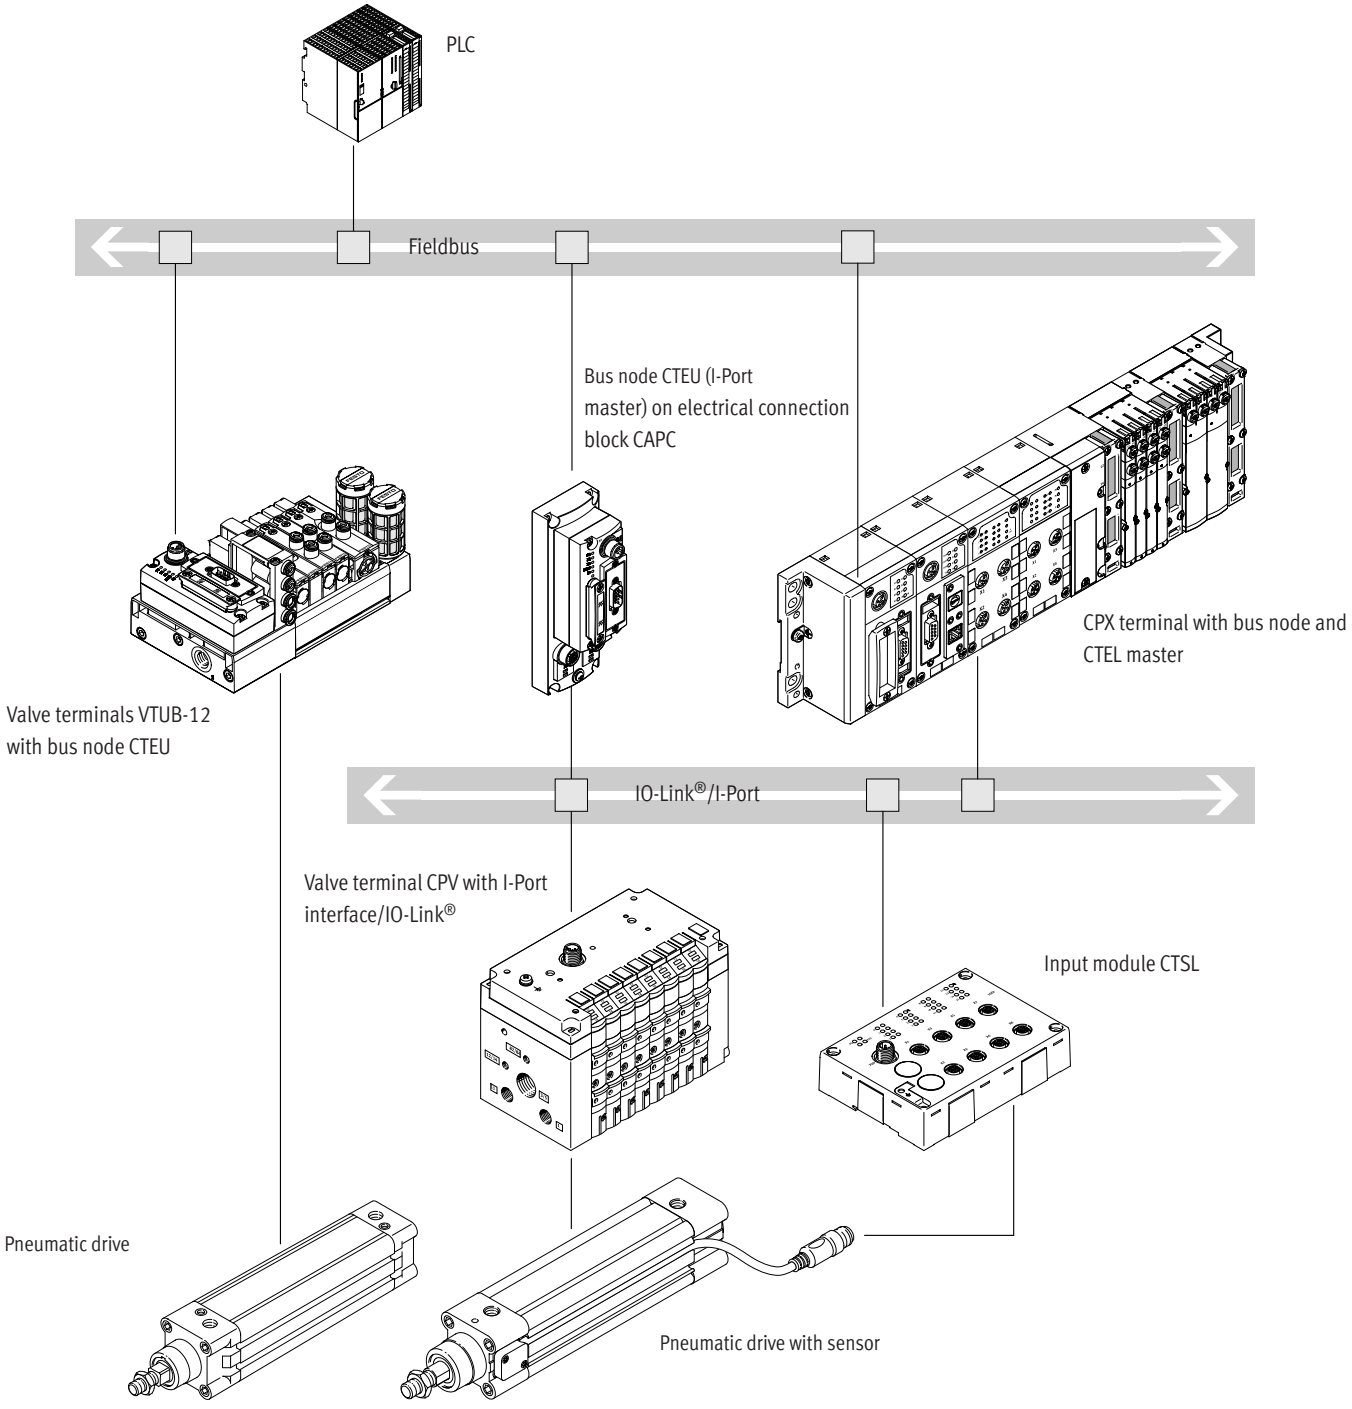
Integration of the I-Port interface/IO-Link®

Different bus nodes are used for integration in the control systems of various manufacturers.

The following protocols are supported with the compatible bus node CTEU:
- CANopen
- DeviceNet®
- EtherCAT®
- CC-LINK®
- PROFIBUS
- AS-Interface
- PROFINET
- EtherNet/IP
- VARAN
- Installation system CPI
- IO-Link®

A second valve terminal can be connected via an electrical connection block (decentralised adapter).
(➔ p.6)

System overview, example




- Communication with the higher-order controller via fieldbus
- Use a fieldbus node CTEU compatible with the fieldbus protocol
- Up to 64 inputs/outputs (solenoid coils), depending on the valve terminal

Key features

System overview

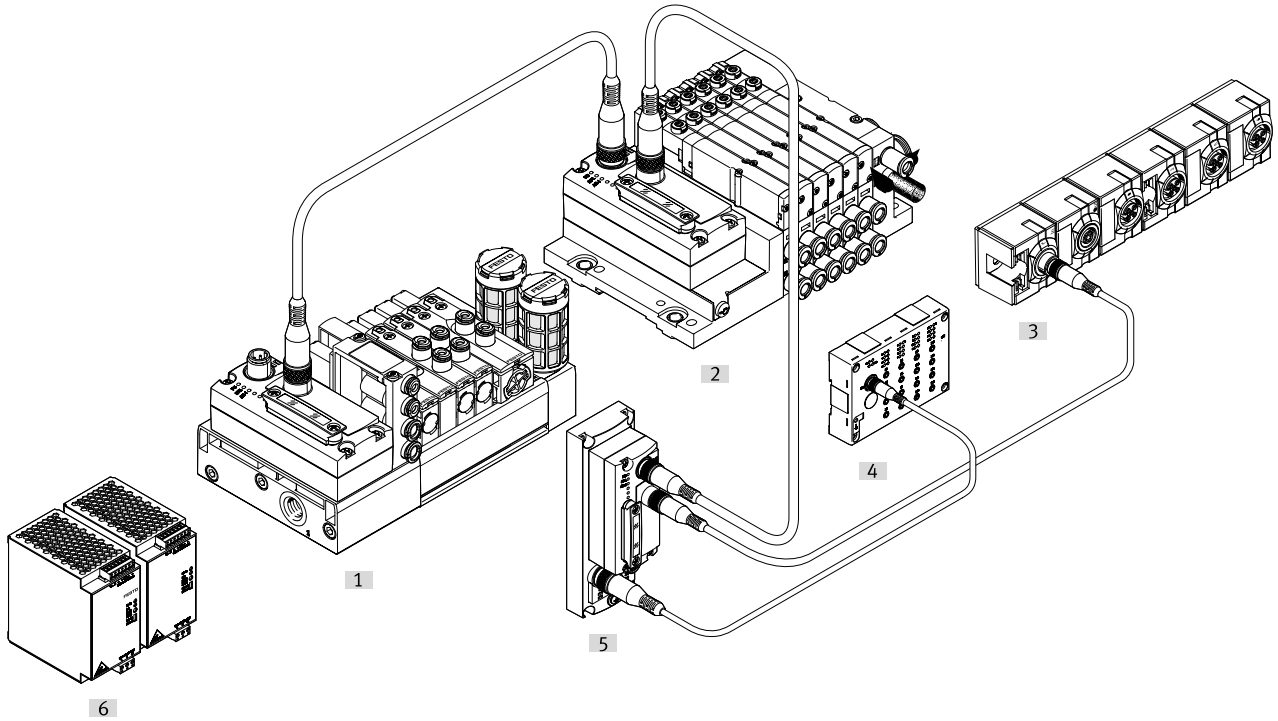
Example CTEU-AS interface



[1] AS-Interface gateway CESA
[2] Valve terminal MPA-L with bus node CTEU-AS
[3] Compact AS-Interface I/O modules
[4] Input module CTSL
[5] Electrical connection block CAPC, decentralised installation with bus node CTEU-AS
[6] Power supply unit CACN for AS-Interface systems

Peripherals overview

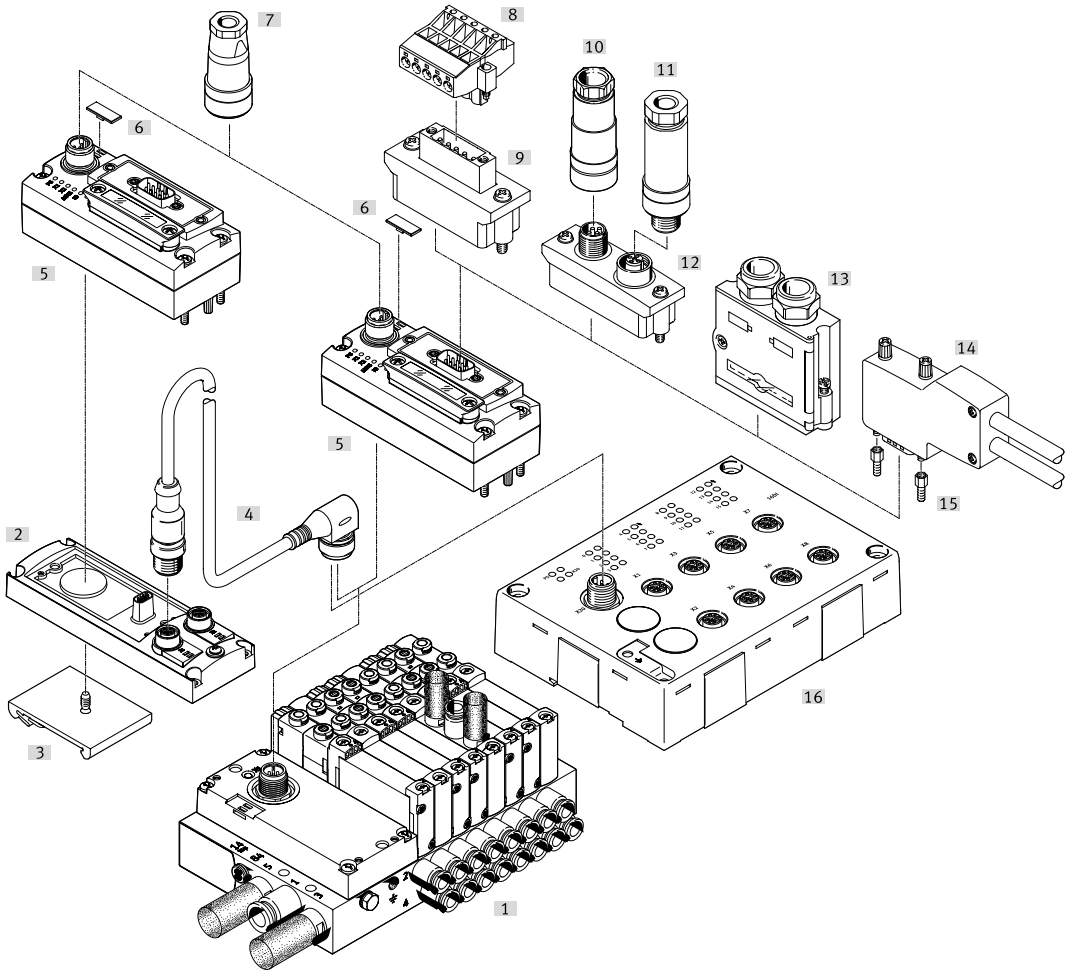Overview of CTEU with valve terminal VTUG



Accessories

		Type	Brief description	→ Page/Internet
[1]	Manifold rail	VABM	With I-Port interface, for connecting max. 35 valves	vtug
[2]	Electrical connection block	CAPC	For connecting a further terminal (2x I-Port interface)	12
[3]	DIN rail adapter	CAFM	For electrical connection block CAPC	13
[4]	Connecting cable	NEBA	For IO-Link®	11, 13
[5]	Bus node	CTEU	–	14, 19, 24, 29, 35, 40, 44, 49. 54, 59
[6]	Inscription labels	ASLR	For bus node	58
[7]	Power supply socket	NTSD/NECB	For power supply	18, 23, 33
[8]	Terminal strip	FBSD-KL	For open style connection	18, 23
[9]	Bus connection	FBA-1	Open style for 5-pin terminal strip	18, 23
[10]	Fieldbus socket	NECB, NECU	For micro style connection, M12, 5-pin	18, 33
[11]	Plug	FBS, NECU	For micro style connection, M12, 5-pin	18, 33
[12]	Bus connection	FBA-2	Micro style, 2xM12, 5-pin	18, 23, 33
[13]	Plug	FBS-SUB-9-BU	Sub-D	18, 23, 33
[14]	Plug	FBS-SUB-9-WS	Sub-D, angled	18, 33
[15]	Threaded sleeve	UNC	Sub-D mounting bolt	18, 23,33
[16]	Input module	CTSL-D-16E	–	86

Key features – Diagnostics

System diagnostics CTEU

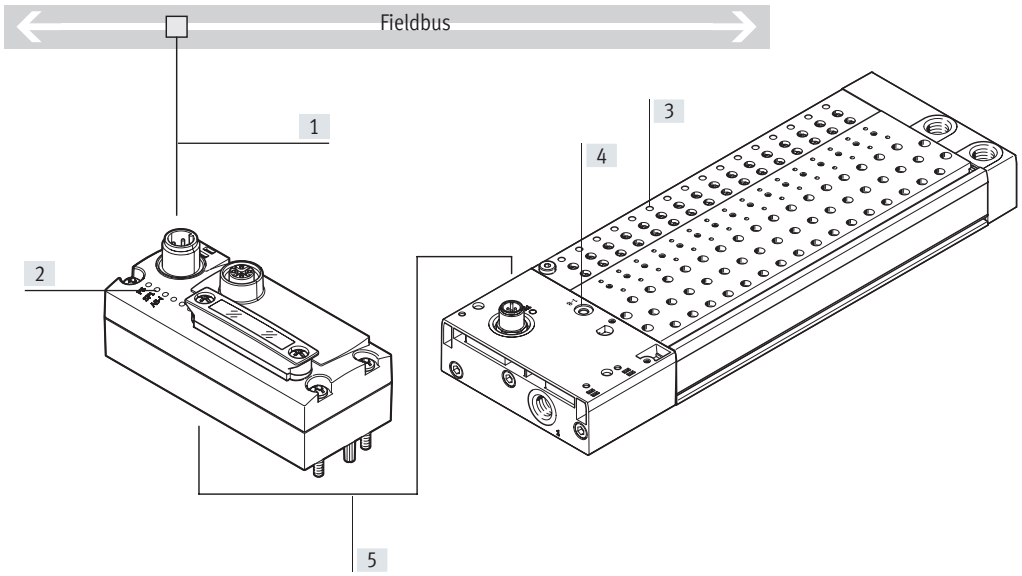
Diagnostics LED on the bus node CTEU

The fieldbus-specific LEDs indicate the communication status and the fieldbus function.

A further LED indicates the status of the power supply:
- Undervoltage/short circuit
- Power supply ensured
- Interruption of voltage

Diagnostic messages via the fieldbus

- Configuration error
- Short circuit/overload of an output module
- Short circuit/undervoltage
- Undervoltage/load voltage of the valves



[1] Diagnostics via fieldbus
[2] Bus-specific LEDs
[3] Switching status display using LEDs (one per valve on the manifold rail)
[4] Additional communication and voltage status LED for decentralised installation
[5] I-Port interface to the fieldbus module

Key features – Power supply

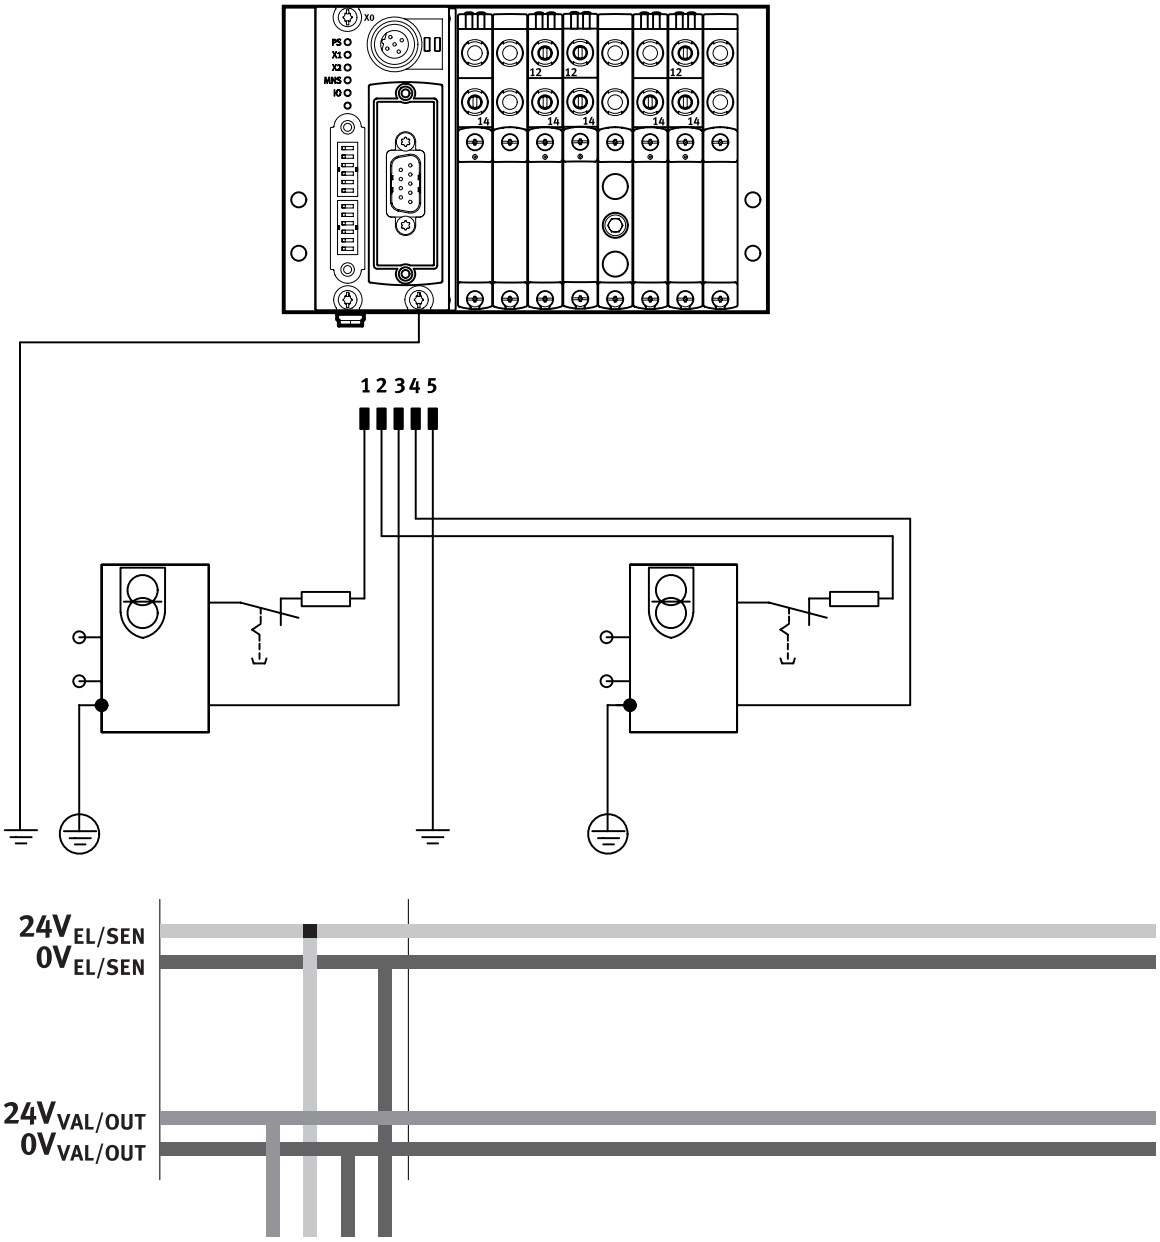
Operating voltage and load current supply

The operating voltages for the valve terminal with I-Port interface are centrally connected to the bus node via a 5-pin M12 plug.

The operating voltages are required for the bus node electronics and the load supply to the valves (supplied separately from the electronics supply).

The power supplies do not have a common 0 V line and are thus completely galvanically isolated from one another.


Example power supply concept CTEU with valve terminal VTUG



Key features – Power supply


Power supply concept

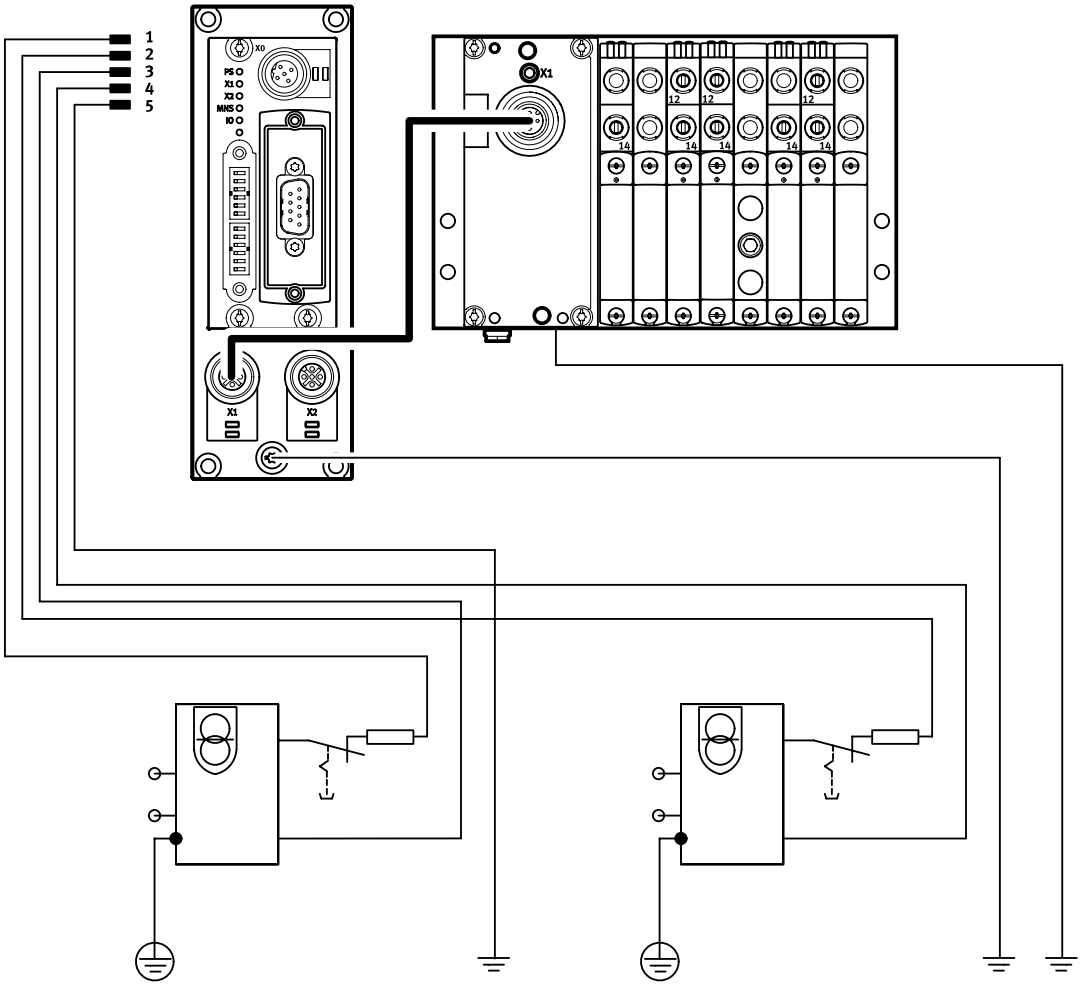Example power supply concept CTEU with electrical connection block (decentralised adapter) CAPC and valve terminal VTUG



Datasheet – I-Port interface/IO-Link® for valve terminal VTUG

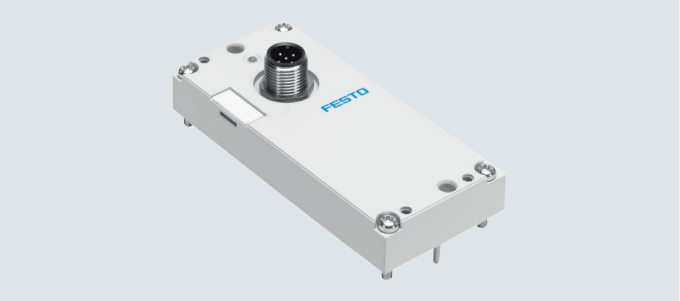Festo-specific, standardised interface for direct connection to the fieldbus by mounting the bus node CTEU or to an IO-Link® master via a cable (in IO-Link® mode).



I-Port interface/IO-Link®

Versions:
- I-Port interface for bus nodes (CTEU)
- IO-Link® mode for direct connection to a higher-level IO-Link master

The electrical supply/transmission of communication takes place via an M12 plug.


General technical data

Types of communication			IO-Link®
Electrical connection			• M12 plug, 5-pin • A-coded • Metal thread for shielding
Baud rates	COM3	[kbps]	230.4
	COM2	[kbps]	38.4
Intrinsic current consumption, logic supply PS		[mA]	30
Intrinsic current consumption, valve supply PL		[mA]	30
Max. number of solenoid coils	VAEM-L1-S-8-PT		16
	VAEM-L1-S-16-PT		32
	VAEM-L1-S-24-PT		48
Max. number of valve positions	VAEM-L1-S-8-PT		8
	VAEM-L1-S-16-PT		16
	VAEM-L1-S-24-PT		24
Ambient temperature		[°C]	–5 ... +50
Degree of protection to EN 60529			IP67

LED indicator

	Colour	Status	Function
Status LED X1	Red/green	Off	No 24 V logic
	2	Status green	Everything OK
	3	Flashing green	Communication error (in the I-Port or IO-Link® protocol)
	4	Flashing red/green	Load supply error (undervoltage or no-load supply)
	5	Static red	Load supply error and communication error

Pin assignment – I-Port interface/IO-Link®




Pin	Assignment	Description
1	$24V_{EL/SEN}$	Operating voltage supply (electronics, sensors/inputs)
2	$24V_{VAL/OUT}$	Load voltage supply (valves/outputs)
3	$0V_{EL/SEN}$	Operating voltage supply (electronics, sensors/inputs)
4	C/Q	Data communication
5	$0V_{VAL/OUT}$	Load voltage supply (valves/outputs)


Datasheet – I-Port interface/IO-Link® for valve terminal VTUG

Dimensions Download CAD data ➔ www.festo.com

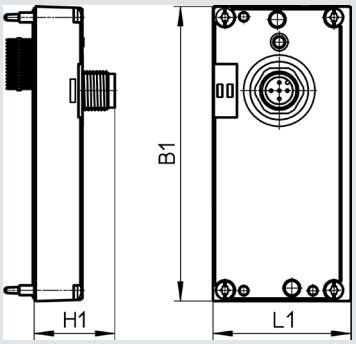Outlet on top







Outlet on the side

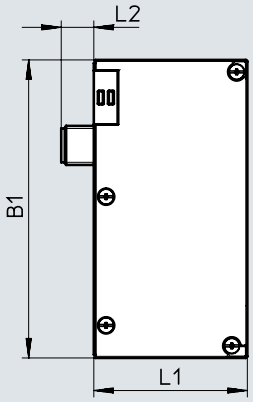

Type	Outlet on top			Outlet on the side		
	B1	L1	H1	B1	L1	L2
VAEM-L1-S-...	91	47.1	25	91.5	47.1	10

Accessories – I-Port interface/IO-Link®

	Description			Part no.	Type
Electrical interface for I-Port interface/IO-Link®, outlet on top					
	Actuation of up to 8 double solenoid valve positions			**573384**	**VAEM-L1-S-8-PT**
	Actuation of up to 16 double solenoid valve positions			**573939**	**VAEM-L1-S-16-PT**
	Actuation of up to 24 double solenoid valve positions			**573940**	**VAEM-L1-S-24-PT**
Electrical interface for I-Port interface/IO-Link®, outlet on the side					
	Actuation of up to 8 double solenoid valve positions			**574207**	**VAEM-L1-S-8-PTL**
	Actuation of up to 16 double solenoid valve positions			**574208**	**VAEM-L1-S-16-PTL**
	Actuation of up to 24 double solenoid valve positions			**574209**	**VAEM-L1-S-24-PTL**
Connection technology for IO-Link®					
	T-adapter M12, 5-pin for IO-Link® and load supply			**171175**	**FB-TA-M12-5POL**
Straight plug, for I-Port/IO-Link®					
	Straight plug, M12, 5-pin (in combination with adapter for separate load supply)			**8162296**	**NECB-S-M12G5-C2**
Inscription label for I-Port/IO-Link®					
	Frame with 40 labels			**565306**	**ASLR-C-E4**
Connecting cable					
	Straight – angled	Suitable for energy chains	5 m	**574321**	**NEBU-M12G5-E-5-Q8N-M12G5**
			7.5 m	**574322**	**NEBU-M12G5-E-7.5-Q8N-M12G5**
			10 m	**574323**	**NEBU-M12G5-E-10-Q8N-M12G5**
	Angled – angled	Standard	0.5 m	**570733**	**NEBU-M12W5-K-0.5-M12W5**
	Straight – angled			**8003617**	**NEBU-M12G5-K-0.5-M12W5**
	Angled – angled		2 m	**570734**	**NEBU-M12W5-K-2-M12W5**
	Straight – angled			**8003618**	**NEBU-M12G5-K-2-M12W5**

Datasheet – Electrical connection block CAPC

Function
With the electrical connection block CAPC, the bus nodes CTEU can be installed decentrally on a valve terminal or input modules with I-Port interface.

Area of application
- M12 connection technology (two interfaces)
- Enables the installation of valve terminals or other devices over a distance of 20 metres
- With the accessory CAFM, the connection block can be installed on a DIN rail



General technical data		
Type		CAPC-F1-E-M12
Dimensions W x L x H	[mm]	50x148x28
Fieldbus interface		2 x M12 socket, 5-pin, A-coded
Operating voltage range	[V DC]	18 ... 30
Max. power supply	[A]	2
Nominal operating voltage	[V DC]	24
Product weight	[g]	85
Cable length	[m]	20

Materials	
Housing	Reinforced PA
Note on materials	RoHs-compliant
LABS (PWIS) conformity	VDMA24364-B2-L

Operating and environmental conditions		
Degree of protection to EN 60529		IP65, IP67
Ambient temperature	[°C]	0 ... 50
Storage temperature	[°C]	–20 ... +70
Corrosion resistance class CRC		2[1)]
CE marking (see declaration of conformity)		To EU EMC Directive[2)]

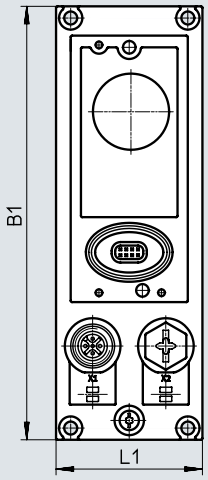
1) More information www.festo.com/x/topic/crc
2) For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... d Support/Downloads.
If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Datasheet – Electrical connection block CAPC


Dimensions

Download CAD data ➔ www.festo.com

CAPC




CAPC with mounted bus node CTEU-CO

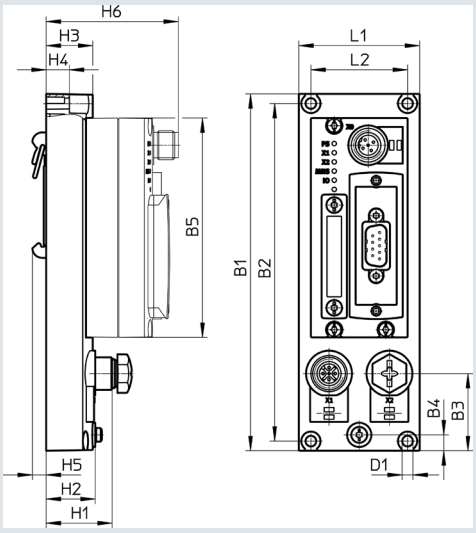




Type	B1	B2	B3	B4	B5	D1 ø	H1	H2	H3	H4	H5	H6	L1	L2
CAPC	148	140	32	6.6	91	4.4	27.3	20.3	19.3	9.6	5.7	54.8	50	40

Pin assignment – I-Port interface/IO-Link®



Pin	Assignment	Description
1	$24V_{EL/SEN}$	Operating voltage supply (electronics, sensors/inputs)
2	$24V_{VAL/OUT}$	Load voltage supply (valves/outputs)
3	$0V_{EL/SEN}$	Operating voltage supply (electronics, sensors/inputs)
4	C/Q	Data communication
5	$0V_{VAL/OUT}$	Load voltage supply (valves/outputs)
Housing, FE		Functional earth

Accessories CAPC

	Description	Part no.	Type
Electrical connection block			
	–	**570042**	**CAPC-F1-E-M12**
DIN rail mounting			
	–	**570043**	**CAFM-F1-H**
Connecting cable			
	Straight – angled, Suitable for energy chains, 5	**574321**	**NEBU-M12G5-E-5-Q8N-M12G5**
	Straight – angled, Suitable for energy chains, 7.5	**574322**	**NEBU-M12G5-E-7.5-Q8N-M12G5**
	Straight – angled, Suitable for energy chains, 10	**574323**	**NEBU-M12G5-E-10-Q8N-M12G5**
	Angled – angled, Standard, 0.5 m	**570733**	**NEBU-M12W5-K-0.5-M12W5**
	Straight – angled, Standard, 0.5 m	**8003617**	**NEBU-M12G5-K-0.5-M12W5**
	Angled – angled, Standard, 2 m	**570734**	**NEBU-M12W5-K-2-M12W5**
	Straight – angled, Standard, 2 m	**8003618**	**NEBU-M12G5-K-2-M12W5**

Datasheet – CTEU-CO

The bus node handles communication between the valve terminal and a higher-order CANopen® master.

The module has basic diagnostic functions. It has 5 integrated LEDs for on-site display. A maximum of 8 byte inputs and 8 byte outputs are transmitted in the cyclic process image.



Application

Fieldbus connection

The bus connection is established via a 9-pin Sub-D plug as per the CAN in Automation (CiA) specification DS 102 with additional 24 V CAN transceiver supply (option as per DS 102).

The bus connector plug (with IP65/IP67 degree of protection from Festo or IP20 degree of protection from other manufacturers) facilitates the connection of an incoming and an outgoing bus cable.

There are 4 contacts available for each of the conductors (CAN_L/CAN_H and 24 V/0 V optional) of the incoming and outgoing bus cables.

The fieldbus parameters and the basic device parameter settings are set on the bus node via DIL switches.

Implementation

Protocol chip used:
- CAN transceiver 82C251

Possible transmission rate:
- 125 kbps
- 250 kbps
- 500 kbps
- 1 Mbps

Max. CANopen cable length (trunk cable):
- 40 m at 1 Mbps
- 100 m at 500 kbps
- 250 m at 250 kbps
- 500 m at 125 kbps

Max. branch cable length (drop cable):
- 0.30 m at 1 Mbps
- 0.75 m at 500 kbps
- 2.00 m at 250 kbps
- 3.75 m at 125 kbps

The following variants can be realised using an adapter:
- 2 x micro style M12, degree of protection IP65, 5-pin, plug and socket
- Open style plug, degree of protection IP20, 5-pin, pin

General technical data		
Fieldbus interface		
Protocol		CANopen
Function		Bus connection incoming/outgoing
Transmission rate	[kbps]	125, 250, 500 and 1000
Type		CAN bus
Connection type		Plug
Connection technology		Sub-D
Number of pins/cores		9
Galvanic isolation		Yes
Internal cycle time		1 ms per 1 byte of user data
Note: Optional connection technology with accessories:		Micro style (plug/socket M12x1 A-coded, 5-pin, degree of protection IP65)
		Open style (terminal strip, 5-pin, degree of protection IP20)
		Open style (screw terminal, 5-pin, degree of protection IP20)
Inputs/outputs		
Max. address volume inputs	[byte]	8
Note on inputs	[byte]	Expandable to max. 16
Max. address volume for outputs	[byte]	8
Note on outputs	[byte]	Expandable to max. 16

Datasheet – CTEU-CO

General data		
Device-specific diagnostics		System diagnostics
		Undervoltage
		Communication error
Parameterisation		Diagnostic behaviour
		Fail-safe response
Additional functions		Emergency message
		Acyclic data access via SDO
Configuration support		EDS files
Control elements		DIL switches
LED indicator	Product-specific	PS: Operating voltage for electronics and load supply
		X1: System status of module at I-Port 1
		X2: System status of module at I-Port 2
	Fieldbus-specific	MNS: Network status
		IO: I/O status

Technical data – Electrics		
Nominal operating voltage	[V DC]	24
Operating voltage range	[V DC]	18 ... 30
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 65
Max. power supply	[A]	4

Power supply	
Function	Electronics and load
Connection type	Plug
Connection technology	M12x1, B-coded to EN 61076-2-101
Number of pins/cores	5

Technical data – Mechanical components		
Type of mounting		On electrical connection block
		On electrical interface
Product weight	[g]	90 (without fieldbus connector and without interlinking module)
Grid dimension	[mm]	40
Dimensions W x L x H	[mm]	40 x 91 x 50


Materials	
Housing	PA
Note on materials	RoHs-compliant
LABS (PWIS) conformity	VDMA24364-Zone III

Datasheet – CTEU-CO

Operating and environmental conditions		
Ambient temperature	[°C]	0 ... 50
Storage temperature	[°C]	–20 ... +70
Corrosion resistance class CRC[1]		2
CE marking (see declaration of conformity)[3]		To EU EMC Directive[2]
		To EU RoHS Directive
UKCA marking (see declaration of conformity)[3]		To UK EMC regulations[2]
		To UK RoHS regulations
KC marking		KC EMC
Certification		c UL us - Listed (OL)
		RCM
Degree of protection		IP65/IP67
Note on degree of protection		In mounted state
		Unused connections sealed



1) More information www.festo.com/x/topic/crc
2) For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... d Support/Downloads.
If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.
3) More information www.festo.com/catalogue/... ➔ Support/Downloads.

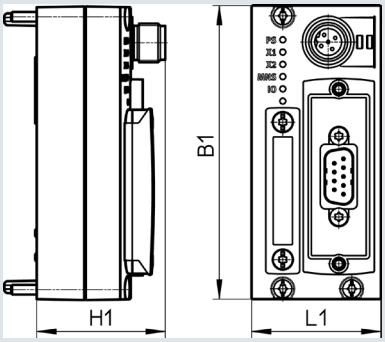Dimensions Download CAD data ➔ www.festo.com






Type	B1	H1	L1
CTEU-CO	91	39.8	40

Pin assignment


	Pin	Assignment	Description
Sub-D, 9-pin, CANopen interface			
	1	n.c.	Not connected
	2	CAN_L	Received/transmitted data low
	3	CAN_GND	0 V CAN interface (connected to pin 6)
	4	n.c.	Not connected
	5	CAN_Shld	Optional shielded connection
	6	GND	0 V CAN interface, optional (connected to pin 3)
	7	CAN_H	Received/transmitted data high
	8	n.c.	Not connected
	9	CAN_V+	24 V DC supply CAN interface
	Housing		Cable shielding, connection to functional earth FE
Power supply, M12, B-coded			
	1	$24V_{EL/SEN}$	Operating voltage supply (electronics, sensors/inputs)
	2	$24V_{VAL/OUT}$	Load voltage supply (valves/outputs)
	3	$0V_{EL/SEN}$	Operating voltage supply (electronics, sensors/inputs)
	4	$0V_{VAL/OUT}$	Load voltage supply (valves/outputs)
	5	FE	Functional earth

Datasheet – CTEU-CO

Pin assignment – CANopen interface










	Pin	Assignment	Description
Micro style bus connection (M12)			
Incoming 	1	Shielding	Connection to FE (functional earth)
	2	CAN_V+	24 V DC supply CAN interface
	3	CAN_GND	0 V CAN interface
	4	CAN_H	Received/transmitted data high
	5	CAN_L	Received/transmitted data low
Outgoing 	1	Shielding	Connection to FE (functional earth)
	2	CAN_V+	24 V DC supply CAN interface
	3	CAN_GND	0 V CAN interface
	4	CAN_H	Received/transmitted data high
	5	CAN_L	Received/transmitted data low
Open style bus connection			
	1	CAN_GND	0 V CAN interface
	2	CAN_L	Received/transmitted data low
	3	Shielding	Connection to FE (functional earth)
	4	CAN_H	Received/transmitted data high
	5	CAN_V+	24 V DC supply CAN interface

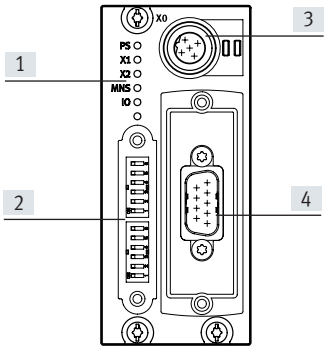Connection and display components



[1] Status LED (operating status/diagnostics)
[2] DIL switch
[3] Power supply for bus node and connected devices (valve terminal)
[4] Fieldbus interface (Sub-D plug)

Accessories – CTEU-CO

Ordering data			Part no.	Type
Bus node				
	CANopen bus node		**570038**	**CTEU-CO**
Bus connection				
	Sub-D socket, straight		**532219**	**FBS-SUB-9-BU-2x5POL-B**
	Sub-D socket for CANopen with terminating resistor and programming interface		**574588**	**NECU-S1W9-C2-ACO**
	Sub-D socket, angled		**533783**	**FBS-SUB-9-WS-CO-K**
	Micro style bus connection, 2xM12, 5-pin, A-coded		**525632**	**FBA-2-M12-5POL**
	Socket for micro style connection, A-coded		**8162291**	**NECB-M12G5-C2**
	Plug for micro style connection, M12, 5-pin, A-coded		**8162296**	**NECB-S-M12G5-C2**
	Open style bus connection		**525634**	**FBA-1-SL-5POL**
	Terminal strip for open style connection, 5-pin		**525635**	**FBSD-KL-2x5POL**
Fitting				
	Threaded sleeve for Sub-D		**533000**	**UNC4-40/M3X8**
Plug socket				
	For power supply		**538999**	**NTSD-GD-9-M12-5POL-RK**
User documentation				
	User documentation – bus node CTEU-CO	German	**573767**	**P.BE-CTEU-CO-OP+MAINT-DE**
		English	**573768**	**P.BE-CTEU-CO-OP+MAINT-EN**
		Spanish	**573769**	**P.BE-CTEU-CO-OP+MAINT-ES**
		French	**573770**	**P.BE-CTEU-CO-OP+MAINT-FR**
		Italian	**573771**	**P.BE-CTEU-CO-OP+MAINT-IT**
		Chinese	**573772**	**P.BE-CTEU-CO-OP+MAINT-ZH**

Datasheet – CTEU-DN

The bus node handles communication between the valve terminal and a higher-order DeviceNet® master.

The module has basic diagnostic functions. It has 5 integrated LEDs for on-site display. Up to 32 byte inputs and 32 byte outputs are typically transmitted in the
are transmitted in the cyclic process image.



Application

Fieldbus connection

The bus connection is established via a 9-pin Sub-D plug with a typical allocation (to EN 50170).

The bus connector plug (with degree of protection IP65/IP67 from Festo or degree of protection IP20 from other manufacturers) facilitates the connection of an incoming and an outgoing bus cable. The fieldbus parameters and the basic device parameter settings are set on the bus node via DIL switches.

Implementation

Protocol chip used:
- CAN transceiver 82C251

Possible transmission rate:
- 125 kbps
- 250 kbps
- 500 kbps

Max. DeviceNet® cable length (trunk cable):
- 100 m at 500 kbps
- 250 m at 250 kbps
- 500 m at 125 kbps

Max. branch cable length (drop cable):
- 6 m at 500 kbps
- 6 m at 250 kbps
- 6 m at 125 kbps

The following variants can be realised using an adapter:
- 2 x micro style M12, degree of protection IP65, 5-pin, plug and socket
- Open style plug, degree of protection IP20, 5-pin, pin

General technical data		
Fieldbus interface		
Protocol		DeviceNet®
Transmission rate	[kbps]	125, 250, 500
Type		CAN bus
Connection type		Plug
Connection technology		Sub-D
Number of pins/cores		9
Galvanic isolation		Yes
Internal cycle time		1 ms per 1 byte of user data
Note: Optional connection technology with accessories:		Micro style (plug/socket M12x1 A-coded, 5-pin, degree of protection IP65)
		Open style (terminal strip, 5-pin, degree of protection IP20)
		Open style (screw terminal, 5-pin, degree of protection IP20)
Inputs/outputs		
Max. address volume inputs	[byte]	8
Max. address volume for outputs	[byte]	8

Datasheet – CTEU-DN

General data		
Device-specific diagnostics		System diagnostics
		Undervoltage
		Communication error
Parameterisation		Diagnostic behaviour
		Fail-safe and idle response
Additional functions		Acyclic data access via "Explicit Message"
		QuickConnect
		System status can be displayed using process data
Configuration support		EDS files
Control elements		DIL switches
LED indicator	Product-specific	PS: Operating voltage for electronics and load supply
		X1: System status of module at I-Port 1
		X2: System status of module at I-Port 2
	Fieldbus-specific	MNS: Network status
		IO: I/O status

Technical data – Electrics		
Nominal operating voltage	[V DC]	24
Operating voltage range	[V DC]	18 ... 30
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 65
Max. power supply	[A]	4
Power supply		
Function		Electronics and load
Connection type		Plug
Connection technology		M12x1, B-coded to EN 61076-2-101
Number of pins/cores		5

Technical data – Mechanical components		
Type of mounting		On electrical connection block
		On electrical interface
Product weight	[g]	90 (without fieldbus connector and without interlinking module)
Grid dimension	[mm]	40
Dimensions W x L x H	[mm]	40 x 91 x 50


Materials	
Housing	PA, PC
Note on materials	RoHs-compliant
LABS (PWIS) conformity	VDMA24364-Zone III

Datasheet – CTEU-DN

Operating and environmental conditions		
Ambient temperature	[°C]	0 ... 50
Storage temperature	[°C]	–20 ... +70
Corrosion resistance class CRC[1]		2
CE marking (see declaration of conformity)[3]		To EU EMC Directive[2]
		To EU RoHS Directive
UKCA marking (see declaration of conformity)[3]		To UK EMC regulations[2]
		To UK RoHS regulations
KC marking		KC EMC
Certification		c UL us - Listed (OL)
		RCM
Degree of protection		IP65/IP67
Note on degree of protection		In mounted state
		Unused connections sealed



1) More information www.festo.com/x/topic/crc
2) For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... d Support/Downloads.
If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.
3) More information www.festo.com/catalogue/... ➔ Support/Downloads.

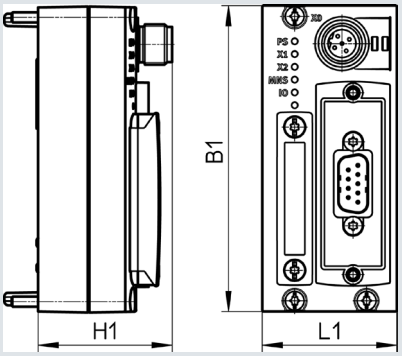Dimensions Download CAD data ➔ www.festo.com






Type	B1	H1	L1
CTEU-DN	91	39.8	40

Pin assignment


	Pin	Assignment	Description
Sub-D, 9-pin, DeviceNet® interface			
	1	n.c.	Not connected
	2	CAN_L	Received/transmitted data low
	3	CAN_GND	0 V CAN interface (connected to pin 6)
	4	n.c.	Not connected
	5	CAN_Shld	Optional shielded connection
	6	GND	0 V CAN interface, optional (connected to pin 3)
	7	CAN_H	Received/transmitted data high
	8	n.c.	Not connected
	9	CAN_V+	24 V DC supply CAN interface
	Housing		Cable shielding, connection to functional earth FE
Power supply, M12, B-coded			
	1	$24V_{EL/SEN}$	Operating voltage supply (electronics, sensors/inputs)
	2	$24V_{VAL/OUT}$	Load voltage supply (valves/outputs)
	3	$0V_{EL/SEN}$	Operating voltage supply (electronics, sensors/inputs)
	4	$0V_{VAL/OUT}$	Load voltage supply (valves/outputs)
	5	FE	Functional earth

Datasheet – CTEU-DN

Pin assignment







	Pin	Assignment	Description
Micro style bus connection (M12)			
Incoming 	1	Shielding	Connection to FE (functional earth)
	2	CAN_V+	24 V DC supply CAN interface
	3	CAN_GND	0 V CAN interface
	4	CAN_H	Received/transmitted data high
	5	CAN_L	Received/transmitted data low
Outgoing 	1	Shielding	Connection to FE (functional earth)
	2	CAN_V+	24 V DC supply CAN interface
	3	CAN_GND	0 V CAN interface
	4	CAN_H	Received/transmitted data high
	5	CAN_L	Received/transmitted data low
Open style bus connection			
	1	CAN_GND	0 V CAN interface
	2	CAN_L	Received/transmitted data low
	3	Shielding	Connection to FE (functional earth)
	4	CAN_H	Received/transmitted data high
	5	CAN_V+	24 V DC supply CAN interface

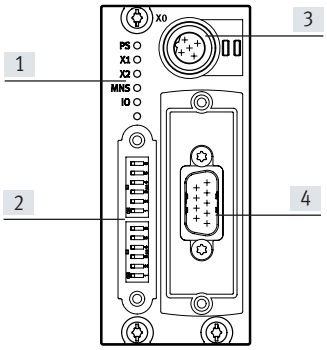Connection and display components



[1] Status LED (operating status/diagnostics)
[2] DIL switch
[3] Power supply for bus node and connected devices (valve terminal)
[4] Fieldbus interface (Sub-D plug)

Accessories – CTEU-DN

Ordering data			Part no.	Type
Bus node				
	DeviceNet® bus node		**570039**	**CTEU-DN**
Bus connection				
	Sub-D socket, straight		**532219**	**FBS-SUB-9-BU-2x5POL-B**
	Micro style bus connection, 2xM12, 5-pin, A-coded		**525632**	**FBA-2-M12-5POL**
	Socket for micro style connection, M12, 5-pin		**8162291**	**NECB-M12G5-C2**
	Plug for micro style connection, M12, 5-pin		**8162296**	**NECB-S-M12G5-C2**
	Open style bus connection		**525634**	**FBA-1-SL-5POL**
	Terminal strip for open style connection, 5-pin		**525635**	**FBSD-KL-2x5POL**
Fitting				
	Threaded sleeve for Sub-D		**533000**	**UNC4-40/M3X8**
Plug socket				
	For power supply		**538999**	**NTSD-GD-9-M12-5POL-RK**
User documentation				
	User documentation – bus node CTEU-DN	German	**573744**	**P.BE-CTEU-DN-OP+MAINT-EN**
		English	**573745**	**P.BE-CTEU-DN-OP+MAINT-EN**
		Spanish	**573746**	**P.BE-CTEU-DN-OP+MAINT-ES**
		French	**573747**	**P.BE-CTEU-DN-OP+MAINT-FR**
		Italian	**573748**	**P.BE-CTEU-DN-OP+MAINT-IT**
		Chinese	**573779**	**P.BE-CTEU-DN-OP+MAINT-ZH**

Datasheet – CTEU-CC

CC-Link

The bus node handles communication between the valve terminal and a higher-order master for Control & Communication Link (CC-Link®).

The module has basic diagnostic functions. It has 5 integrated LEDs for on-site display. A maximum of 8 byte inputs and 8 byte outputs are transmitted in the cyclic process image.



Application

Fieldbus connection

The bus connection is established via a screw terminal with degree of protection IP20, a 9-pin Sub-D socket with degree of protection IP65/IP67 from Festo or a Sub-D socket with degree of protection IP20 from other manufacturers.

The module has a system and load supply, a fieldbus connection and a connection to the valve terminal with serial I-Port interface.

Both connection types have the function of an integrated T-distributor and thus support the connection of an incoming and outgoing bus cable.

The integrated interface with RS485 transmission technology is designed for the typical CC-Link 3-conductor connection technology (in accordance with CLPA CC-Link Spec. V1.1).

Implementation

Protocol chip used:
- MFP3 from Mitsubishi

Maximum CC-Link cable length (minimum 0.2 m between devices):
- 100 m at 10 Mbps
- 150 m at 5 Mbps
- 200 m at 2.5 Mbps
- 600 m at 625 kbps
- 1200 m at 156 kbps

When using branch lines: maximum branch line length 8 m, maximum 6 stations per branch line
Length of main string:
- 100 m at 625 kbps, total length of branch line 50 m
- 500 m at 156 kbps, total length of branch line 200 m

Higher baud rates not permitted with a branch line.

The following variant can be realised using an adapter:
- Spring-loaded terminal with degree of protection IP65

General technical data		
Fieldbus interface		
Protocol		CC-LINK®
Function		Bus connection incoming/outgoing
Transmission rate	[kbps]	156 ... 10000
Type		Serial interface
Connection type		Socket
Connection technology		Sub-D
Number of pins/cores		9
Galvanic isolation		Yes
Internal cycle time		1 ms per 1 byte of user data
Note: Optional connection technology with accessories:		Open style (screw terminal, 5-pin, degree of protection IP20)
Inputs/outputs		
Max. address volume inputs	[byte]	16
Max. address volume for outputs	[byte]	16

Datasheet – CTEU-CC

General data		
Device-specific diagnostics		System diagnostics
		Undervoltage
		Communication error
Parameterisation		Activating diagnostics
		Fail-safe and idle response
Additional functions		System status can be displayed using process data
Control elements		DIL switches
LED indicator	Product-specific	PS: Operating voltage for electronics and load supply
		X1: System status of module at I-Port 1
		X2: System status of module at I-Port 2
	Fieldbus-specific	Err: Data transmission error
		Run: Bus active

Technical data – Electrics		
Nominal operating voltage	[V DC]	24
Operating voltage range	[V DC]	18 ... 30
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 70
Max. power supply	[A]	4
Power supply		
Function		Electronics and load
Connection type		Plug
Connection technology		M12x1, A-coded to EN 61076-2-101
Number of pins/cores		5

Technical data – Mechanical components		
Type of mounting		On electrical connection block
		On electrical interface
Product weight	[g]	90 (without fieldbus connector and without interlinking module)
Grid dimension	[mm]	40
Dimensions W x L x H	[mm]	40 x 91 x 50


Materials	
Housing	PA
Note on materials	RoHs-compliant
LABS (PWIS) conformity	VDMA24364-Zone III

Datasheet – CTEU-CC

Operating and environmental conditions		
Ambient temperature	[°C]	0 ... 50
Storage temperature	[°C]	–20 ... +70
Corrosion resistance class CRC[1)]		2
CE marking (see declaration of conformity)[3)]		To EU EMC Directive[2)]
		To EU RoHS Directive
UKCA marking (see declaration of conformity)[3)]		To UK EMC regulations[2)]
		To UK RoHS regulations
KC marking		KC EMC
Certification		c UL us - Listed (OL)
		RCM
Degree of protection		IP65/IP67
Note on degree of protection		In mounted state
		Unused connections sealed



1) More information www.festo.com/x/topic/crc
2) For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... d Support/Downloads.
If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.
3) More information www.festo.com/catalogue/... ➔ Support/Downloads.

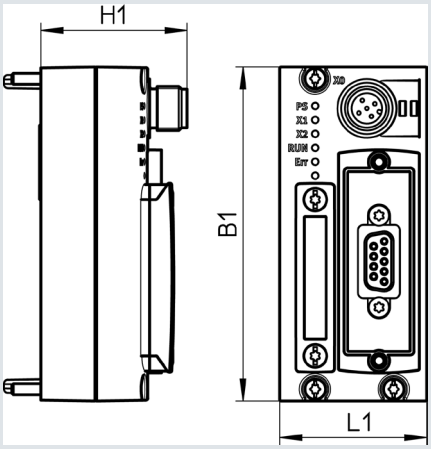Dimensions Download CAD data ➔ www.festo.com




Type	B1	H1	L1
CTEU-CC	91	39.8	40

Pin assignment


	Pin	Assignment	Description
Sub-D, 9-pin, CC-Link interface			
	1	n.c.	Not connected
	2	DA	Data transmission line A
	3	DG	Data transmission line ground (data reference potential)
	4	n.c.	Not connected
	5	n.c.	Not connected
	6	n.c.	Not connected
	7	DB	Data transmission line B
	8	n.c.	Not connected
	9	n.c.	Not connected
	Housing		Cable shielding, connection to functional earth FE
Power supply, M12, A-coded			
	1	$24V_{EL/SEN}$	Operating voltage supply (electronics, sensors/inputs)
	2	$24V_{VAL/OUT}$	Load voltage supply (valves/outputs)
	3	$0V_{EL/SEN}$	Operating voltage supply (electronics, sensors/inputs)
	4	$0V_{VAL/OUT}$	Load voltage supply (valves/outputs)
	5	FE	Functional earth

Datasheet – CTEU-CC

Pin assignment



Terminal assignment	Pin	Description
Bus connection, FBS-SUB-9-GS-24XPOL-B		
	DA	Data transmission line A
	DB	Data transmission line B
	DG	Data transmission line ground (data reference potential)
	n.c.	Not connected
	FE	Connected to the housing of the Sub-D plug with a clamping clip

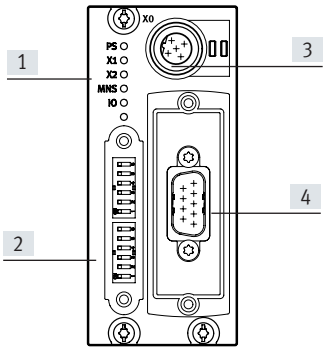Connection and display components



[1] Status LED (operating status/diagnostics)
[2] DIL switch
[3] Power supply for bus node and connected devices (valve terminal)
[4] Fieldbus interface (Sub-D socket)

Accessories – CTEU-CC

Ordering data		Part no.	Type
Bus node			
	CC-Link® bus node	**1544198**	**CTEU-CC**
Bus connection			
	Sub-D plug, straight	**532220**	**FBS-SUB-9-GS-2x4POL-B**
Fitting			
	Threaded sleeve for Sub-D	**533000**	**UNC4-40/M3X8**
Plug socket			
	For power supply, M12x1, 5-pin	**8162291**	**NECB-M12G5-C2**

Datasheet – CTEU-PB

The bus node handles communication between the valve terminal and a higher-order master for PROFIBUS DP®.

The module has basic diagnostic functions. It has 4 integrated LEDs for on-site display. A maximum of 8 byte inputs and 8 byte outputs are transmitted in the cyclic process image.



Application

Fieldbus connection

The bus connection is established via a 9-pin Sub-D socket with the typical PROFIBUS allocation (to EN 50170).

The bus connector plug (with IP65/IP67 degree of protection from Festo or IP20 degree of protection from other manufacturers) facilitates the connection of an incoming and an outgoing bus cable.

An active bus terminal can be connected using the DIL switch integrated in the plug.

The Sub-D interface is designed for controlling network components with a fibre-optic cable connection.

Transmission rate/overview of cable lengths

- RS 485 transceiver used: Analog Devices ADM 2485
- PROFIBUS slave controller used: Profichip VPC+S

Possible transmission rate:	Maximum fieldbus length:	Maximum branch line length:
9.6 kbps	1200 m	500 m
19.2 kbps	1200 m	500 m
93.75 kbps	1200 m	100 m
187.5 kbps	1000 m	33.3 m
500 kbps	400 m	20 m
1.5 Mbps	200 m	6.6 m
3 Mbps ... 12 Mbps	100 m	–

General technical data		
Fieldbus interface		
Protocol		PROFIBUS DP
Function		Bus connection incoming/outgoing
Transmission rate	[kbps]	9.6, 19.2, 93.75, 187.5, 500
	[Mbps]	1.5, 12
Type		PROFIBUS
Connection type		Socket
Connection technology		Sub-D
Number of pins/cores		9
Galvanic isolation		Yes
Internal cycle time		1 ms per 1 byte of user data
Note: Optional connection technology with accessories:		Plug/socket M12x1 B-coded, 5-pin, degree of protection IP65
Inputs/outputs		
Max. address volume inputs	[byte]	16
Max. address volume for outputs	[byte]	16

Datasheet – CTEU-PB

General data		
Device-specific diagnostics		System diagnostics
		Undervoltage
		Communication error
Parameterisation		Diagnostic behaviour
		Fail-safe response
Additional functions		Emergency message
		System status via diagnostic test
Configuration support		GSD file
Control elements		DIL switches
LED indicator	Product-specific	PS: Operating voltage for electronics and load supply
		X1: System status of module at I-Port 1
		X2: System status of module at I-Port 2
	Fieldbus-specific	BF: Bus fault

Technical data – Electrics		
Nominal operating voltage	[V DC]	24
Operating voltage range	[V DC]	18 ... 30
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 100
Max. power supply	[A]	4
Power supply		
Function		Electronics and load
Connection type		Plug
Connection technology		M12x1, A-coded to EN 61076-2-101
Number of pins/cores		5

Technical data – Mechanical components		
Type of mounting		On electrical connection block
		On electrical interface
Product weight	[g]	90 (without fieldbus connector and without interlinking module)
Grid dimension	[mm]	40
Dimensions W x L x H	[mm]	40 x 91 x 50

Materials	
Housing	PA
Note on materials	RoHs-compliant
LABS (PWIS) conformity	VDMA24364-Zone III

Datasheet – CTEU-PB


Operating and environmental conditions			
Type		CTEU-PB	CTEU-PB-EX1C
Ambient temperature	[°C]	0 ... 50	–5 ... +50
Storage temperature	[°C]	–20 ... +70	–20 ... +70
Corrosion resistance class CRC[1)]		2	2
CE marking (see declaration of conformity)[3)]		To EU EMC Directive[2)]	To EU EMC Directive[2)]
		To EU RoHS Directive	To EU RoHS Directive
UKCA marking (see declaration of conformity)[3)]		To UK EMC regulations[2)]	To UK EMC regulations[2)]
		To UK RoHS regulations	To UK RoHS regulations
KC marking		KC EMC	–
Certification		c UL us - Listed (OL)	c UL us - Listed (OL)
		RCM	RCM
Degree of protection		IP65/IP67	IP65/IP67
Note on degree of protection		In mounted state	In mounted state
		Unused connections sealed	Unused connections sealed

1) More information www.festo.com/x/topic/crc
2) For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... d Support/Downloads.
If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.
3) More information www.festo.com/catalogue/... → Support/Downloads.

ATEX	
Type	CTEU-PB-EX1C
Certificate-issuing authority	UL E239998
	SITIIAS CCC 202032230700686
	NEPSI GYJ19.1188X
	KTL 24-KA4BO-0395X
	KTL 24-KA4BO-0394X
	KTL 24-KA4BO-0393X
	KTL 24-KA4BO-0392X
	IECEx IBE 19.0018 X
	IBExU16ATEXB021 X
	DNV 23.0350 X/00
Type of ignition protection for dust	Ex tc IIIC T135°C Dc X
ATEX category for dust	II 3D
Type of (ignition) protection for gas	Ex ec IIC Gc X
ATEX category for gas	II 3G
Explosion protection certification outside the EU	EPL Gc (US), (KR), (IEC-EX), (GB), (CN), (CA)
	EPL Ga (BR)
	EPL Dc (US), (KR), (IEC-EX), (GB), (CN), (CA), (BR)
	Class III (US), (CA)
	Class II, Div. 2 (US), (CA)
	Class I, Div. 2 (US), (CA)
Explosion protection	Class I, Div. 2 (US), (CA)
	Class II, Div. 2 (US), (CA)
	Zone 0 (BR)
	Zone 2 (ATEX), (CA), (CN), (IEC-EX), (KR), (UKEX), (US)
	Zone 22 (ATEX), (BR), (CA), (CN), (IEC-EX), (KR), (UKEX), (US)





Datasheet – CTEU-PB

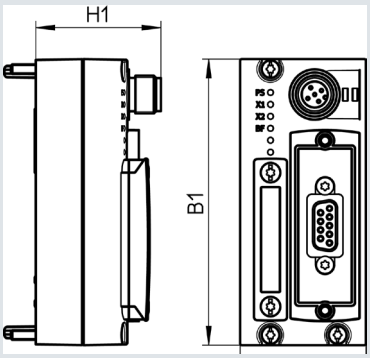Dimensions Download CAD data ➔ www.festo.com




Type	B1	H1	L1
CTEU-PB	91	39.8	40

Pin assignment

	Pin	Assignment	Description
Sub-D, 9-pin, PROFIBUS interface			
	1	Shielding	Functional earth
	2	n.c.	Not connected
	3	RxD/TxD-P	Received/transmitted data positive
	4	CNTR-P	Repeater control signal
	5	DGND	Data reference potential
	6	VP	Supply voltage positive (+ 5 V)
	7	n.c.	Not connected
	8	RxD/TxD-N	Received/transmitted data negative
	9	n.c.	Not connected
	Housing		Cable shielding, connection to functional earth FE
Power supply, M12, A-coded			
	1	$24V_{EL/SEN}$	Operating voltage supply (electronics, sensors/inputs)
	2	$24V_{VAL/OUT}$	Load voltage supply (valves/outputs)
	3	$0V_{EL/SEN}$	Operating voltage supply (electronics, sensors/inputs)
	4	$0V_{VAL/OUT}$	Load voltage supply (valves/outputs)
	5	FE	Functional earth
Bus connection M12 adapter (B-coded)			
Incoming 	1	n.c.	Not connected
	2	RxD/TxD-N	Received/transmitted data N
	3	n.c.	Not connected
	4	RxD/TxD-P	Received/transmitted data P
	5 and M12	Shielding	Connection to FE (functional earth)
Outgoing 	1	VP	Supply voltage (P5V)
	2	RxD/TxD-N	Received/transmitted data N
	3	DGND	Data reference potential (M5V)
	4	RxD/TxD-P	Received/transmitted data P
	5 and M12	Shielding	Connection to FE (functional earth)


Connection and display components











[1] Status LED (operating status/diagnostics)
[2] DIL switch
[3] Power supply for bus node and connected devices (valve terminal)
[4] Fieldbus interface (Sub-D socket)

Accessories – CTEU-PB

Ordering data – Bus node

				Part no.	Type
Bus node					
	PROFIBUS bus node	Certification c UL us - Listed (OL)	KC mark KC-EMC	**570040**	**CTEU-PB**
			–	**8107588**	**CTEU-PB-EX1C**

Ordering data – Accessories for CTEU-PB

			Part no.	Type
Bus connection				
	Sub-D plug, straight		**532216**	**FBS-SUB-9-GS-DP-B**
	Sub-D plug, straight, with terminating resistor and programming interface		**574589**	**NECU-S1W9-C2-APB**
	Sub-D plug, angled		**533780**	**FBS-SUB-9-WS-PB-K**
	Bus connection M12 adapter, B-coded		**533118**	**FBA-2-M12-5POL-RK**
	Straight socket, M12x1, 5-pin, for assembling a connecting cable compatible with FBA-2-M12-5POL-RK		**1067905**	**NECU-M-B12G5-C2-PB**
	Straight plug, M12x1, 5-pin, for assembling a connecting cable compatible with FBA-2-M12-5POL-RK		**1066354**	**NECU-M-S-B12G5-C2-PB**
	Terminating resistor, M12, B-coded for PROFIBUS		**1072128**	**CACR-S-B12G5-220-PB**
Fitting				
	Threaded sleeve for Sub-D		**533000**	**UNC4-40/M3X8**
Plug socket				
	For power supply, M12x1, 5-pin		**8162291**	**NECB-M12G5-C2**
User documentation				
	User documentation – bus node CTEU-PB	German	**575392**	**P.BE-CTEU-PB-OP+MAINT-DE**
		English	**575393**	**P.BE-CTEU-PB-OP+MAINT-EN**
		Spanish	**575394**	**P.BE-CTEU-PB-OP+MAINT-ES**
		French	**575395**	**P.BE-CTEU-PB-OP+MAINT-FR**
		Italian	**575396**	**P.BE-CTEU-PB-OP+MAINT-IT**
		Chinese	**575397**	**P.BE-CTEU-PB-OP+MAINT-ZH**


Accessories – CTEU-PB

Ordering data – Accessories for CTEU-PB		Part no.	Type
Inscription label holder			
	5 frames with 40 pieces each	**565306**	**ASLR-C-E4**

Datasheet – CTEU-EC

The bus node handles communication between the valve terminal and a higher-order master for EtherCAT®.

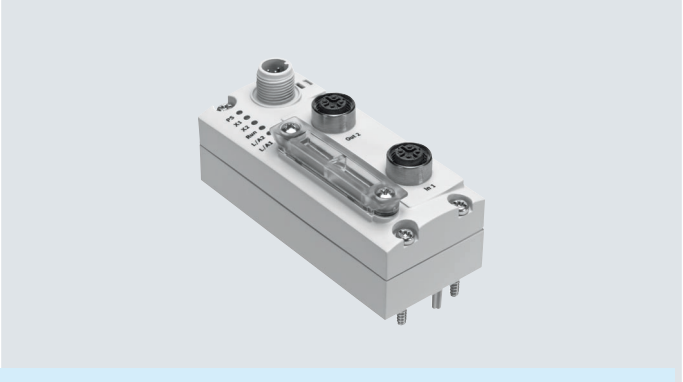The module has basic diagnostic functions.
It has 6 integrated status LEDs for on-site display.
A maximum of 16 byte inputs and 16 byte outputs are transmitted in the cyclic process image.



Application

Fieldbus connection

The bus connection is established via two M12 sockets, D-coded to IEC 61076-2-101 with degree of protection IP65/IP67.
Both connections are equivalent 100BaseTX Ethernet ports with integrated auto MDI functionality (crossover and patch cables can be used) that are brought together via an internal switch.

The module has a system and load supply, a fieldbus connection and a connection to the valve terminal with serial I-Port interface.

Please observe the applicable specifications such as the cable specifications for Ethernet networks ISO/IEC 11801 and ANSI/TIA/EIA-568-B.

- Maximum cable length (between network stations): 100 m
- Transmission rate: 100 Mbps
- EtherCAT® communication chip: ASIC ET1100

EtherCAT bus node

The EtherCAT® bus node supports the EtherCAT® protocol based on the Ethernet standard and TCP/IP technology to IEEE802.3.
This guarantees a data exchange with a high data transmission rate, for example I/O data from sensors, actuators or robot controllers, PLCs or process equipment. In addition, non-real-time critical information such as diagnostic information, configuration information, etc. can be transferred.
The data bandwidth is sufficient to transfer both data types (real-time and non-real-time) in parallel.

The bus node has a system and load supply, EtherCAT® input and output port, LEDs for status and diagnostic messages and DIL switches. Diagnostics is possible directly at the bus node and/or via fieldbus.
The bus node has separate operating and load voltage supplies.
The bus node is mounted on an I-Port compatible device (e.g. valve terminal or electrical connection block) from Festo.
The bus node supplies voltage to downstream devices connected via the I-Port interface.

The following can be set via DIL switch:
- Station addresses
- Diagnostics on/off
- Fail state behaviour

General technical data		
Fieldbus interface		
Protocol		EtherCAT®
Function		Bus connection incoming/outgoing
Transmission rate	[Mbps]	100
Type		Ethernet
Connection type		2 x socket
Connection technology		M12x1, D-coded to EN 61076-2-101
Number of pins/cores		4
Galvanic isolation		Yes
Internal cycle time		1 ms per 1 byte of user data
Inputs/outputs		
Max. address volume inputs	[byte]	16
Max. address volume for outputs	[byte]	16

Datasheet – CTEU-EC

General data		
Device-specific diagnostics		System diagnostics
		Undervoltage
		Communication error
Parameterisation		Activating diagnostics
		Fail-safe and idle response
Additional functions		Diagnostics object
		Acyclic data access via SDO
		Emergency message
		Modular Device Profile (MDP)
Configuration support		XML file
Control elements		DIL switches
LED indicator	Product-specific	PS: Operating voltage for electronics and load supply
		X1: System status of module at I-Port 1
		X2: System status of module at I-Port 2
	Fieldbus-specific	Run: Operating status (communication status)
		L/A2: Network active (connection status) port 2 (Out)
		L/A1: Network active (connection status) port 1 (In)

Technical data – Electrics		
Nominal operating voltage	[V DC]	24
Operating voltage range	[V DC]	18 ... 30
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 60
Max. power supply	[A]	4
Power supply		
Function		Electronics and load
Connection type		Plug
Connection technology		M12x1, A-coded to EN 61076-2-101
Number of pins/cores		5

Technical data – Mechanical components		
Type of mounting		On electrical connection block
		On electrical interface
Product weight	[g]	90 (without fieldbus connector and without interlinking module)
Grid dimension	[mm]	40
Dimensions W x L x H	[mm]	40 x 91 x 50


Materials	
Housing	PA
Note on materials	RoHs-compliant
LABS (PWIS) conformity	VDMA24364-Zone III

Datasheet – CTEU-EC

Operating and environmental conditions		
Ambient temperature	[°C]	0 ... 50
Storage temperature	[°C]	–20 ... +70
Corrosion resistance class CRC[1]		2
CE marking (see declaration of conformity)[3]		To EU EMC Directive[2]
		To EU RoHS Directive
UKCA marking (see declaration of conformity)[3]		To UK EMC regulations[2]
		To UK RoHS regulations
KC marking		KC EMC
Certification		c UL us - Listed (OL)
		RCM
Degree of protection		IP65/IP67
Note on degree of protection		In mounted state
		Unused connections sealed

1) More information www.festo.com/x/topic/crc
2) For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... d Support/Downloads.
If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.
3) More information www.festo.com/catalogue/... ➔ Support/Downloads.


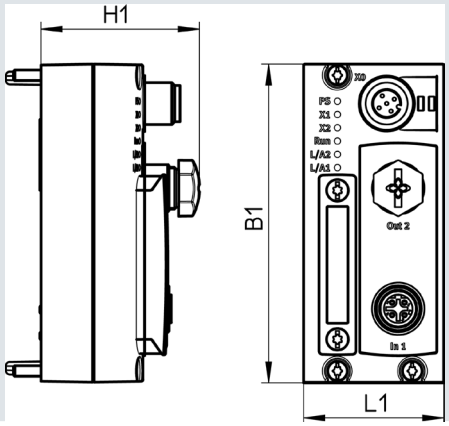
Dimensions Download CAD data ➔ www.festo.com




Type	B1	H1	L1
CTEU-EC	91	45.3	40

Datasheet – CTEU-EC

Pin assignment






	Pin	Assignment	Description
EtherCAT® interface, M12, D-coded			
	1	TX+	Transmitted data+
	2	RX+	Received data+
	3	TX-	Transmitted data-
	4	RX-	Received data-
	Housing		Cable shielding, connection to functional earth FE
Power supply, M12, A-coded			
	1	$24V_{EL/SEN}$	Operating voltage supply (electronics, sensors/inputs)
	2	$24V_{VAL/OUT}$	Load voltage supply (valves/outputs)
	3	$0V_{EL/SEN}$	Operating voltage supply (electronics, sensors/inputs)
	4	$0V_{VAL/OUT}$	Load voltage supply (valves/outputs)
	5	FE	Functional earth

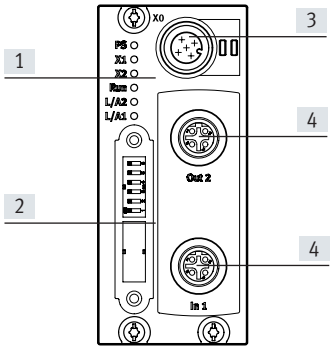Connection and display components



[1] Status LED (operating status/diagnostics)
[2] DIL switch
[3] Power supply for bus node and connected devices (valve terminal)
[4] Fieldbus connection (M12 socket, D-coded)

Accessories – CTEU-EC

Ordering data				Part no.	Type
Bus node					
	EtherCAT® bus node			**572556**	**CTEU-EC**
Plug for bus connection					
	Plug M12x1, 4-pin, D-coded			**543109**	**NECU-M-S-D12G4-C2-ET**
Connecting cable for bus connection					
	Straight plug, M12x1, 4-pin, D-coded	Straight plug, M12x1, 4-pin, D-coded	0.5 m	**8040446**	**NEBC-D12G4-ES-0.5-S-D12G4-ET**
			1 m	**8040447**	**NEBC-D12G4-ES-1-S-D12G4-ET**
			3 m	**8040448**	**NEBC-D12G4-ES-3-S-D12G4-ET**
			5 m	**8040449**	**NEBC-D12G4-ES-5-S-D12G4-ET**
			10 m	**8040450**	**NEBC-D12G4-ES-10-S-D12G4-ET**
		Straight plug, RJ45, 8-pin	1 m	**8040451**	**NEBC-D12G4-ES-1-S-R3G4-ET**
			3 m	**8040452**	**NEBC-D12G4-ES-3-S-R3G4-ET**
			5 m	**8040453**	**NEBC-D12G4-ES-5-S-R3G4-ET**
			10 m	**8040454**	**NEBC-D12G4-ES-10-S-R3G4-ET**
		Open end, 4-core	5 m	**8040456**	**NEBC-LE4-ES-5-D12G4-ET**
Plug socket for power supply					
	Socket M12x1, 5-pin			**8162291**	**NECB-M12G5-C2**
Connecting cable for power supply					
	• Socket M12x1, 5-pin • Plug M12x1, 5-pin	Suitable for energy chains	5 m	**574321**	**NEBU-M12G5-E-5-Q8N-M12G5**
			7.5 m	**574322**	**NEBU-M12G5-E-7.5-Q8N-M12G5**
			10 m	**574323**	**NEBU-M12G5-E-10-Q8N-M12G5**
		Standard	0.5 m	**570733**	**NEBU-M12W5-K-0.5-M12W5**
				8003617	**NEBU-M12G5-K-0.5-M12W5**
			2 m	**570734**	**NEBU-M12W5-K-2-M12W5**
				8003618	**NEBU-M12G5-K-2-M12W5**
User documentation					
	User documentation – bus node CTEU-EC	User documentation – bus node CTEU-EC	German	**575400**	**P.BE-CTEU-EC-OP+MAINT-DE**
			English	**575401**	**P.BE-CTEU-EC-OP+MAINT-EN**
			Spanish	**575402**	**P.BE-CTEU-EC-OP+MAINT-ES**
			French	**575403**	**P.BE-CTEU-EC-OP+MAINT-FR**
			Italian	**575404**	**P.BE-CTEU-EC-OP+MAINT-IT**
			Chinese	**575405**	**P.BE-CTEU-EC-OP+MAINT-ZH**

Datasheet – CTEU-AS

The bus node handles communication between the valve terminal and a higher-order AS-Interface® master.

- Activation of up to 16 solenoid coils per valve terminal
- Automatic addressing
- Automatic detection of the number of connected valves



Characteristics

The module has a system and load supply, a bus connection and a connection to the valve terminal with serial I-Port interface.

The module has basic diagnostic functions.
It has 3 integrated LEDs for on-site indication.

A maximum of 2 byte inputs and 2 byte outputs are transmitted in the cyclic process image.

General technical data		
Fieldbus interface 1		
Protocol		AS-Interface
Function		Incoming bus connection
		Power supply
Type		AS-Interface
Connection type		Plug
Connection technology		M12x1, A-coded to EN 61076-2-101
Number of pins/cores		4
Internal cycle time	[ms]	10
Fieldbus interface 2		
Function		Outgoing bus connection
		Power supply
Connection type		Socket
Connection technology		M12x1, A-coded to EN 61076-2-101
Number of pins/cores		4
Inputs/outputs		
Max. address volume inputs	[byte]	2
Max. address volume for outputs	[byte]	2

Datasheet – CTEU-AS

General data		
Device-specific diagnostics		System diagnostics
		Undervoltage
		Communication error
Parameterisation		Watchdog enable
		Watchdog disable
Additional functions		Emergency message
		Acyclic data access via SDO
Configuration support		None
Control elements		DIL switches
LED indicator	Product-specific	PS: Operating voltage for electronics and load supply
		X1: System status of module at I-Port 1
	Fieldbus-specific	AS-i: AS-Interface operation

Technical data – Electrics		
Nominal operating voltage	[V DC]	30
Operating voltage range	[V DC]	20 ... 31.6
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 50
Max. power supply	[A]	4

Technical data – Mechanical components		
Type of mounting		On electrical connection block
		On electrical interface
Product weight	[g]	90 (without AS-i plug and without interlinking module)
Grid dimension	[mm]	40
Dimensions W x L x H	[mm]	40 x 91 x 50


Materials	
Housing	PA
Note on materials	RoHs-compliant
LABS (PWIS) conformity	VDMA24364-Zone III

Operating and environmental conditions		
Ambient temperature	[°C]	0 ... 50
Storage temperature	[°C]	–20 ... +70
Corrosion resistance class CRC[1)]		2
CE marking (see declaration of conformity)[3)]		To EU EMC Directive[2)]
		To EU RoHS Directive
UKCA marking (see declaration of conformity)[3)]		To UK EMC regulations[2)]
		To UK RoHS regulations
Certification		c UL us - Listed (OL)
Degree of protection		IP65/IP67
Note on degree of protection		In mounted state
		Unused connections sealed

1) More information www.festo.com/x/topic/crc
2) For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... d Support/Downloads.
If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.
3) More information www.festo.com/catalogue/... → Support/Downloads.



Datasheet – CTEU-AS

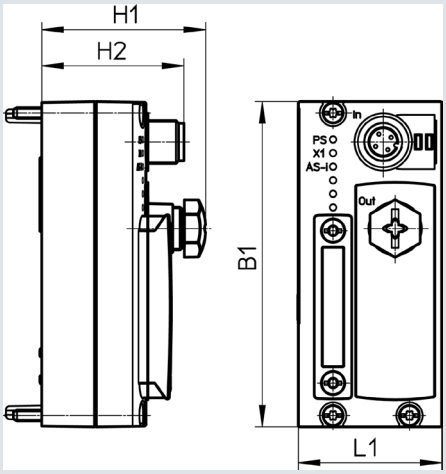Dimensions




Type	B1	H1	H2	L1
CTEU-AS	91	45.3	39.7	40

Pin assignment




	Pin	Allocation
M12 plug, AS-interface In		
	1	AS-Interface +
	2	24 V load voltage supply
	3	AS-Interface –
	4	0 V load voltage supply
M12 socket, AS-i Out		
	1	AS-Interface +
	2	24 V load voltage supply
	3	AS-Interface –
	4	0 V load voltage supply

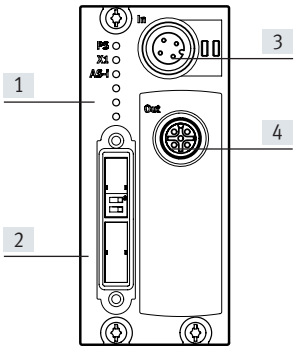Connection and display components



[1] Status LED (operating status/diagnostics)
[2] DIL switch
[3] Plug M12, AS-Interface bus and auxiliary power supply (AS-i In)
[4] M12 socket, AS-Interface bus and auxiliary power supply (AS-i Out)


Accessories – CTEU-AS

Ordering data				Part no.	Type
Bus node					
	AS-Interface bus node			**572555**	**CTEU-AS**
Cable socket without load voltage supply					
	Flat cable, screw terminal	4-pin straight socket, M12x1, A-coded		**18789**	**ASI-SD-PG-M12**
Flat cable					
	AS-Interface flat cable		Yellow	**18940**	**KASI-1.5-Y-100**
			Black	**18941**	**KASI-1.5-Z-100**
	Cable sleeve for insulating and sealing the flat cable			**165593**	**ASI-KT-FK**
	Cable cap for insulating and sealing the flat cable			**18787**	**ASI-KK-FK**

Datasheet – CTEU-PN

The bus node handles communication between the valve terminal and a higher-order PROFINET® master.

The module has basic diagnostic functions. It has 6 integrated LEDs for on-site indication. A maximum of 64 byte inputs and 64 byte outputs are transmitted in the cyclic process image.



Application

Fieldbus connection

The bus connection is established via two M12 sockets, D-coded to IEC 61076-2-101 with degree of protection IP65, IP67.

Both connections are equivalent 100BaseTX Ethernet ports (as per IEEE 802.3).

There is also an integrated switch function that enables free selection of the ports TP1/TP2 for PROFINET communication.

The voltage for the CTEU-PN bus node is supplied via an M12 plug, 5-pin, A-coded.

I-Port interface

The bus node supports two interfaces for connecting I-Port devices.

When mounting the bus node on a valve terminal (direct integration), only one interface is used.

When using the bus node CTEU-PN on the electrical connection block CAPC (installation system CTEL),

both interfaces are available via the electrical connection block.

General technical data		
Fieldbus interface		
Protocol		PROFINET RT
Function		Bus connection incoming/outgoing
Transmission rate	[Mbps]	100
Type		Ethernet
Connection type		2 x socket
Connection technology		M12x1, D-coded to EN 61076-2-101
Number of pins/cores		4
Galvanic isolation		Yes
Internal cycle time		1 ms per 1 byte of user data
Inputs/outputs		
Max. address volume inputs	[byte]	64
Max. address volume for outputs	[byte]	64

Datasheet – CTEU-PN

General data		
Device-specific diagnostics		System diagnostics
		Undervoltage
		Communication error
Additional functions		Conformance class C
		Fast start-up (FSU)
		LLDP
		MRP
		PROFINET IRT
		PROFIenergy
		SNMP
		Shared device
		Webserver
Configuration support		GSDML file
LED indicator	Product-specific	PS: Operating voltage for electronics and load supply
		X1: System status of module at I-Port 1
		X2: System status of module at I-Port 2
	Fieldbus-specific	NF: Network fault
		TP1: Network active port 1
		TP2: Network active port 2

Technical data – Electrics		
Nominal operating voltage	[V DC]	24
Operating voltage range	[V DC]	18 ... 30
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 80
Max. power supply	[A]	4

Power supply	
Function	Electronics and load
Connection type	Plug
Connection technology	M12x1, A-coded to EN 61076-2-101
Number of pins/cores	5

Technical data – Mechanical components		
Type of mounting		On electrical connection block
		On electrical interface
Product weight	[g]	93
Grid dimension	[mm]	40
Dimensions W x L x H	[mm]	40 x 91 x 50

Materials	
Housing	PA
Note on materials	RoHs-compliant
LABS (PWIS) conformity	VDMA24364-Zone III

Datasheet – CTEU-PN


Operating and environmental conditions			
Type		CTEU-PN	CTEU-PN-EX1C
Ambient temperature	[°C]	0 ... 50	–5 ... +50
Storage temperature	[°C]	–20 ... +70	–20 ... +70
Corrosion resistance class CRC[1)]		2	2
CE marking (see declaration of conformity)[3)]		To EU EMC Directive[2)]	To EU EMC Directive[2)]
		To EU RoHS Directive	To EU RoHS Directive
UKCA marking (see declaration of conformity)[3)]		To UK EMC regulations[2)]	To UK EMC regulations[2)]
		To UK RoHS regulations	To UK RoHS regulations
KC marking		KC EMC	–
Certification		c UL us - Listed (OL)	c UL us - Listed (OL)
		RCM	RCM
Degree of protection		IP65/IP67	IP65/IP67
Note on degree of protection		In mounted state	In mounted state
		Unused connections sealed	Unused connections sealed

1) More information www.festo.com/x/topic/crc
2) For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... d Support/Downloads.
If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.
3) More information www.festo.com/catalogue/... → Support/Downloads.

ATEX	
Type	CTEU-PN-EX1C
Certificate-issuing authority	UL E239998
	SITIIAS CCC 202032230700686
	NEPSI GYJ19.1188X
	KTL 24-KA4BO-0395X
	KTL 24-KA4BO-0394X
	KTL 24-KA4BO-0393X
	KTL 24-KA4BO-0392X
	IECEx IBE 19.0018 X
	IBExU16ATEXB021 X
	DNV 23.0350 X/00
Type of ignition protection for dust	Ex tc IIIC T135°C Dc X
ATEX category for dust	II 3D
Type of (ignition) protection for gas	Ex ec IIC Gc X
ATEX category for gas	II 3G
Explosion protection certification outside the EU	EPL Gc (US), (KR), (IEC-EX), (GB), (CN), (CA)
	EPL Ga (BR)
	EPL Dc (US), (KR), (IEC-EX), (GB), (CN), (CA), (BR)
	Class III (US), (CA)
	Class II, Div. 2 (US), (CA)
	Class I, Div. 2 (US), (CA)



Datasheet – CTEU-PN

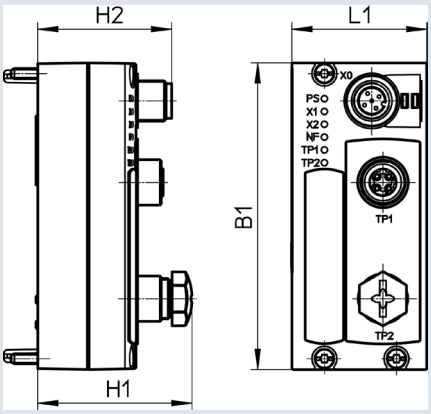Dimensions Download CAD data ➔ www.festo.com




Type	B1	H1	H2	L1
CTEU-PN	91	45.7	39.7	40

Pin assignment

	Pin	Assignment	Description
PROFINET interface, M12 socket, 4-pin, D-coded			
	1	TX+	Differential transmitter cable, positive signal
	2	RX+	Differential receiver cable, positive signal
	3	TX-	Differential transmitter cable, negative signal
	4	RX-	Differential receiver cable, negative signal
	Housing		Functional earth
Power supply, M12 plug, 5-pin, A-coded			
	1	$24V_{EL/SEN}$	Operating voltage supply (internal electronics, I-Port devices)
	2	$24V_{VAL/OUT}$	Load voltage supply (I-Port devices)
	3	$0V_{EL/SEN}$	Operating voltage supply (internal electronics, I-Port devices)
	4	$0V_{VAL/OUT}$	Load voltage supply (I-Port devices)
	5	FE	Functional earth

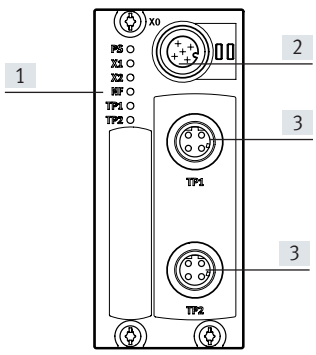
Connection and display components






[1] Status LED (operating status/diagnostics)
[2] Power supply for bus node and connected devices (valve terminal)
[3] Fieldbus connection

Accessories CTEU-PN

Ordering data – Bus node

				Part no.	Type
Bus node					
	PROFINET bus node	Certification c UL us - Listed (OL)	KC mark KC-EMC	**2201471**	**CTEU-PN**
			–	**8107589**	**CTEU-PN-EX1C**

Ordering data – Accessories for CTEU-PN

				Part no.	Type
Plug for bus connection					
	Plug M12x1, 4-pin, D-coded			**543109**	**NECU-M-S-D12G4-C2-ET**
Connecting cable for bus connection					
	Straight plug, M12x1, 4-pin, D-coded	Straight plug, M12x1, 4-pin, D-coded	0.5 m	**8040446**	**NEBC-D12G4-ES-0.5-S-D12G4-ET**
			1 m	**8040447**	**NEBC-D12G4-ES-1-S-D12G4-ET**
			3 m	**8040448**	**NEBC-D12G4-ES-3-S-D12G4-ET**
			5 m	**8040449**	**NEBC-D12G4-ES-5-S-D12G4-ET**
			10 m	**8040450**	**NEBC-D12G4-ES-10-S-D12G4-ET**
		Straight plug, RJ45, 8-pin	1 m	**8040451**	**NEBC-D12G4-ES-1-S-R3G4-ET**
			3 m	**8040452**	**NEBC-D12G4-ES-3-S-R3G4-ET**
			5 m	**8040453**	**NEBC-D12G4-ES-5-S-R3G4-ET**
			10 m	**8040454**	**NEBC-D12G4-ES-10-S-R3G4-ET**
		Open end, 4-core	5 m	**8040456**	**NEBC-LE4-ES-5-D12G4-ET**
Plug socket for power supply					
	Socket M12x1, 5-pin			**8162291**	**NECB-M12G5-C2**
Connecting cable for power supply					
	• Socket M12x1, 5-pin • Plug M12x1, 5-pin	Suitable for energy chains	5 m	**574321**	**NEBU-M12G5-E-5-Q8N-M12G5**
			7.5 m	**574322**	**NEBU-M12G5-E-7.5-Q8N-M12G5**
			10 m	**574323**	**NEBU-M12G5-E-10-Q8N-M12G5**
		Standard	0.5 m	**570733**	**NEBU-M12W5-K-0.5-M12W5**
				8003617	**NEBU-M12G5-K-0.5-M12W5**
			2 m	**570734**	**NEBU-M12W5-K-2-M12W5**
				8003618	**NEBU-M12G5-K-2-M12W5**

Datasheet – CTEU-EP

EtherNet/IP™

The bus node handles communication between the valve terminal and a higher-order master via Ethernet.

The module has basic diagnostic functions. It has 6 integrated LEDs for on-site display. A maximum of 64 byte inputs and 64 byte outputs are transmitted in the cyclic process image



Application

The bus node CTEU-EP is a module within the CTEU series which can be used to connect I-Port devices with specification V1.0 to an EtherNet/IP or Modbus/TCP bus.
Depending on the installation, the bus node provides two I-Port interfaces for the connection of I-Port devices.

Installation

Direct integration

- Mounting the bus node on an I-Port device, e.g. valve terminal
- One I-Port interface available (for internal communication)

Adapter CAPC

- Mounting the bus node on the adapter
- Two I-Port interfaces available on the adapter

Power supply

The power is supplied to the bus node and the connected I-Port devices via an M12 plug, 5-pin, A-coded, on the top side of the housing.

Ethernet connection

The bus node CTEU-EP provides two 100BASE-TX Ethernet interfaces (as per IEEE802.3) that are electrically isolated from the rest of the internal electronics.
The integrated switch function differentiates automatically between the incoming and outgoing Ethernet connection, regardless of the network connection used.

General technical data		
Fieldbus interface		
Protocol		EtherNet/IP
		Modbus TCP
Transmission rate	[Mbps]	11 0/100
Fieldbus interface		2x socket, M12x1, 4-pin, D-coded
Internal cycle time		1 ms per 1 byte of user data
Inputs/outputs		
Max. address volume inputs	[byte]	64
Max. address volume for outputs	[byte]	64

Technical data – Electrics		
Nominal operating voltage	[V DC]	24
Operating voltage range	[V DC]	18 ... 30
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 65
Max. power supply	[A]	4

Datasheet – CTEU-EP

General data		
Device-specific diagnostics		System diagnostics
		Undervoltage
		Communication error
Parameterisation		Diagnostic behaviour
		Fail-safe and idle response
Additional functions		AddressConflictDetection (ACD)
		Acyclic data access via "Explicit Message"
		EtherNet/IP Quickconnect
		IP addressing via DHCP, DIL switch, fieldbus or FFT
		Integrated switch
		Ring topology (DLR)
		SNMP
		Start-up parameterisation in plain text via fieldbus
		System status can be displayed using process data
		Webserver
Configuration support		EDS files
Control elements		DIL switches
LED indicator	Product-specific	PS: Operating voltage for electronics and load supply
		X1: System status of module at I-Port 1
		X2: System status of module at I-Port 2
	Fieldbus-specific	TP1: Network active port 1
		TP2: Network active port 2
		NS: Network status

Technical data – Mechanical components		
Product weight	[g]	98
Dimensions W x L x H	[mm]	40 x 91 x 50

Materials	
Housing	PA
Note on materials	RoHs-compliant
LABS (PWIS) conformity	VDMA24364-Zone III

Operating and environmental conditions			
Type		CTEU-EP	CTEU-EP-EX1C
Ambient temperature	[°C]	0 ... 50	–5 ... +50
Storage temperature	[°C]	–20 ... +70	–20 ... +70
Corrosion resistance class CRC[1)]		2	2
CE marking (see declaration of conformity)[3)]		To EU EMC Directive[2)]	To EU EMC Directive[2)]
		To EU RoHS Directive	To EU RoHS Directive
UKCA marking (see declaration of conformity)[3)]		To UK EMC regulations[2)]	To UK EMC regulations[2)]
		To UK RoHS regulations	To UK RoHS regulations
KC marking		KC EMC	–
Certification		c UL us - Listed (OL)	c UL us - Listed (OL)
		RCM	RCM
Degree of protection		IP65/IP67	IP65/IP67


1) More information www.festo.com/x/topic/crc
2) For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... d Support/Downloads.
If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.
3) More information www.festo.com/catalogue/... → Support/Downloads.

Datasheet – CTEU-EP

ATEX	
Type	CTEU-EP-EX1C
Certificate-issuing authority	UL E239998
	SITIIAS CCC 202032230700686
	NEPSI GYJ19.1188X
	KTL 24-KA4BO-0395X
	KTL 24-KA4BO-0394X
	KTL 24-KA4BO-0393X
	KTL 24-KA4BO-0392X
	IECEx IBE 19.0018 X
	IBExU16ATEXB021 X
	DNV 23.0350 X/00
Type of ignition protection for dust	Ex tc IIIC T135°C Dc X
ATEX category for dust	II 3D
Type of (ignition) protection for gas	Ex ec IIC Gc X
ATEX category for gas	II 3G
Explosion protection certification outside the EU	EPL Gc (US), (KR), (IEC-EX), (GB), (CN), (CA)
	EPL Ga (BR)
	EPL Dc (US), (KR), (IEC-EX), (GB), (CN), (CA), (BR)
	Class III (US), (CA)
	Class II, Div. 2 (US), (CA)
	Class I, Div. 2 (US), (CA)



Datasheet – CTEU-EP

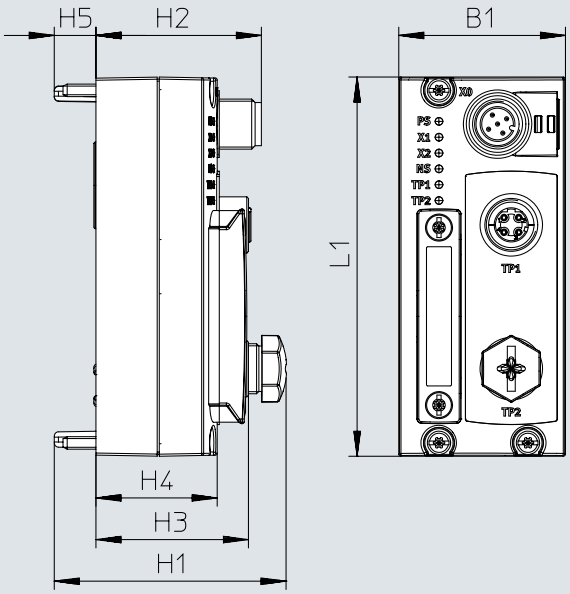Dimensions Download CAD data ➔ www.festo.com




Type	L1	H1	H2	H3	H4	H5	B1
CTEU-EP	91	55.6	39.7	36.6	29.1	10	40

Pin assignment





	Pin	Assignment	Description
Ethernet interface, socket M12, 4-pin, D-coded			
	1	TX+	Differential transmitter cable, positive signal
	2	RX+	Differential receiver cable, positive signal
	3	TX-	Differential transmitter cable, negative signal
	4	RX-	Differential receiver cable, negative signal
	Housing		Functional earth
Power supply, M12, A-coded			
	1	$24V_{EL/SEN}$	Operating voltage supply (electronics, sensors/inputs)
	2	$24V_{VAL/OUT}$	Load voltage supply (valves/outputs)
	3	$0V_{EL/SEN}$	Operating voltage supply (electronics, sensors/inputs)
	4	$0V_{VAL/OUT}$	Load voltage supply (valves/outputs)
	5	FE	Functional earth

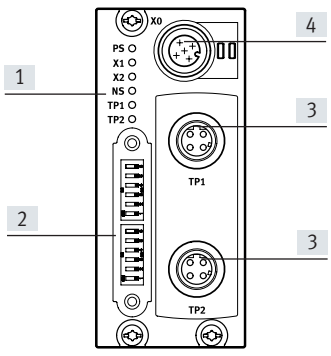Connection and display components



[1] Status LED (operating status/diagnostics)
[2] DIL switch
[3] Network connections (network ports TP1/TP2, fieldbus interface)
[4] Power supply connection


Accessories – CTEU-EP

Ordering data				Part no.	Type
Bus node					
	EP bus node	Certification c UL us - Listed (OL)	KC mark KC-EMC	**2798071**	**CTEU-EP**
			–	**8107591**	**CTEU-EP-EX1C**
Plug for bus connection					
	Plug M12x1, 4-pin, D-coded			**543109**	**NECU-M-S-D12G4-C2-ET**
Connecting cable for bus connection					
	Straight plug, M12x1, 4-pin, D-coded	Straight plug, M12x1, 4-pin, D-coded	0.5 m	**8040446**	**NEBC-D12G4-ES-0.5-S-D12G4-ET**
			1 m	**8040447**	**NEBC-D12G4-ES-1-S-D12G4-ET**
			3 m	**8040448**	**NEBC-D12G4-ES-3-S-D12G4-ET**
			5 m	**8040449**	**NEBC-D12G4-ES-5-S-D12G4-ET**
			10 m	**8040450**	**NEBC-D12G4-ES-10-S-D12G4-ET**
		Straight plug, RJ45, 8-pin	1 m	**8040451**	**NEBC-D12G4-ES-1-S-R3G4-ET**
			3 m	**8040452**	**NEBC-D12G4-ES-3-S-R3G4-ET**
			5 m	**8040453**	**NEBC-D12G4-ES-5-S-R3G4-ET**
			10 m	**8040454**	**NEBC-D12G4-ES-10-S-R3G4-ET**
		Open end, 4-core	5 m	**8040456**	**NEBC-LE4-ES-5-D12G4-ET**
Plug socket for power supply					
	Socket M12x1, 5-pin			**8162291**	**NECB-M12G5-C2**
Connecting cable for power supply					
	• Socket M12x1, 5-pin • Plug M12x1, 5-pin	Suitable for energy chains	5 m	**574321**	**NEBU-M12G5-E-5-Q8N-M12G5**
			7.5 m	**574322**	**NEBU-M12G5-E-7.5-Q8N-M12G5**
			10 m	**574323**	**NEBU-M12G5-E-10-Q8N-M12G5**
		Standard	0.5 m	**570733**	**NEBU-M12W5-K-0.5-M12W5**
				8003617	**NEBU-M12G5-K-0.5-M12W5**
			2 m	**570734**	**NEBU-M12W5-K-2-M12W5**
				8003618	**NEBU-M12G5-K-2-M12W5**

Datasheet CTEU-VN

The bus node handles communication between the valve terminal and a higher-order master for VARAN.

The module has basic diagnostic functions. It has 5 integrated LEDs for on-site display. Up to 32 byte inputs and 32 byte outputs are typically transmitted in the
cyclic process image.



Application

Bus connection

The bus node provides two VARAN interfaces in line with IEEE802.3 that are galvanically isolated from the rest of the internal electronics.

The Ethernet cables are connected via a 4-pin, D-coded M12 socket.

The metal M12 push-in connectors of the ports on the bus node are connected directly to FE.

The connections are marked as IN XF1 and OUT XF2.

Type of installation

Direct integration:
In the case of direct mounting on an I-Port device, only one I-Port can be used. The connection with the device is established via a 5-pin, A-coded M12 socket.

Decentralised installation of CTEL system with adapter CAPC:
If the bus node is used on an adapter CAPC, the electrical connection of both I-Ports is established via an 8-pin socket strip.

General technical data		
Fieldbus interface		
Protocol		VARAN
Transmission rate	[Mbps]	100
Type		Ethernet
Connection type		2 x socket
Connection technology		M12x1, D-coded to EN 61076-2-101
Number of pins/cores		4
Galvanic isolation		Yes
Internal cycle time		1 ms per 1 byte of user data
Function		Bus connection incoming/outgoing
Inputs/outputs		
Max. address volume inputs	[byte]	32
Max. address volume for outputs	[byte]	32

Datasheet CTEU-VN

General data	
Diagnostics	System diagnostics
	Undervoltage
	Communication error
Parameterisation	IO-Link® mode
	Fail-safe response
Additional functions	FFT
	VARAN splitter
Configuration support	LASAL module
LED indicator	PS: Operating voltage for electronics and load supply
	X1: System status of module at I-Port 1
	X2: System status of module at I-Port 2
	XF1 AC: network data exchange, port 1
	XF1 LI: network active, port 1

Technical data – Electrics		
Nominal operating voltage	[V DC]	24
Operating voltage range	[V DC]	18 ... 30
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 65
Max. power supply	[A]	4
Power supply		
Function		Electronics and load
Connection type		Plug
Connection technology		M12x1, A-coded to EN 61076-2-101
Number of pins/cores		5

Technical data – Mechanical components		
Type of mounting		On electrical connection block
		On electrical interface
Product weight	[g]	98
Grid dimension	[mm]	40
Dimensions W x L x H	[mm]	40 x 91 x 50


Materials	
Housing	PA
Note on materials	RoHs-compliant
LABS (PWIS) conformity	VDMA24364-Zone III

Datasheet CTEU-VN

Operating and environmental conditions		
Ambient temperature	[°C]	–5 ... +50
Storage temperature	[°C]	–20 ... +70
Corrosion resistance class CRC[1)]		2
CE marking (see declaration of conformity)[3)]		To EU EMC Directive[2)]
		To EU RoHS Directive
UKCA marking (see declaration of conformity)[3)]		To UK EMC regulations[2)]
		To UK RoHS regulations
KC marking		KC EMC
Certification		RCM
Degree of protection		IP65/IP67
Note on degree of protection		In mounted state
		Unused connections sealed

1) More information www.festo.com/x/topic/crc
2) For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... d Support/Downloads.
If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.
3) More information www.festo.com/catalogue/... ➔ Support/Downloads.


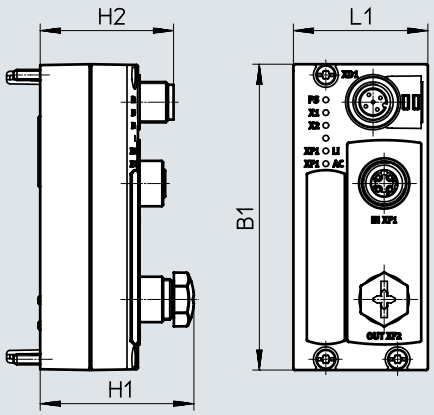
Dimensions Download CAD data ➔ www.festo.com




Type	B1	H1	H2	L1
CTEU-VN	91	45.7	39.7	40

Datasheet CTEU-VN

Pin assignment







	Pin		Assignment	Description
	IN XF1	OUT XF2		
Ethernet interface, socket, M12, 4-pin				
	1	2	TX+	Differential transmitter cable, positive signal
	2	1	RX+	Differential receiver cable, positive signal
	3	4	TX-	Differential transmitter cable, negative signal
	4	3	RX-	Differential receiver cable, negative signal
Power supply, M12 plug, A-coded				
	1	–	$24V_{EL/SEN}$	Operating voltage supply PS I-Port devices
	2	–	$24V_{VAL/OUT}$	Load voltage supply PL I-Port devices
	3	–	$0V_{EL/SEN}$	Operating voltage supply PS I-Port devices
	4	–	$0V_{VAL/OUT}$	Load voltage supply PL I-Port devices
	5	–	FE	Functional earth

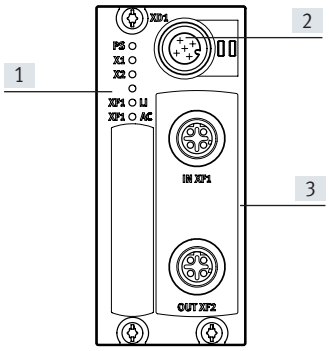Connection and display components



[1] Status LED (operating status/diagnostics)
[2] Power supply
[3] Bus interface incoming IN XF1/outgoing OUT XF2


Accessories CTEU-VN

Ordering data				Part no.	Type
Bus node					
	VARAN bus node			**8087559**	**CTEU-VN**
Plug for bus connection					
	Plug M12x1, 4-pin, D-coded			**543109**	**NECU-M-S-D12G4-C2-ET**
Connecting cable for bus connection					
	Straight plug, M12x1, 4-pin, D-coded	Straight plug, M12x1, 4-pin, D-coded	0.5 m	**8040446**	**NEBC-D12G4-ES-0.5-S-D12G4-ET**
			1 m	**8040447**	**NEBC-D12G4-ES-1-S-D12G4-ET**
			3 m	**8040448**	**NEBC-D12G4-ES-3-S-D12G4-ET**
			5 m	**8040449**	**NEBC-D12G4-ES-5-S-D12G4-ET**
			10 m	**8040450**	**NEBC-D12G4-ES-10-S-D12G4-ET**
		Straight plug, RJ45, 8-pin	1 m	**8040451**	**NEBC-D12G4-ES-1-S-R3G4-ET**
			3 m	**8040452**	**NEBC-D12G4-ES-3-S-R3G4-ET**
			5 m	**8040453**	**NEBC-D12G4-ES-5-S-R3G4-ET**
			10 m	**8040454**	**NEBC-D12G4-ES-10-S-R3G4-ET**
		Open end, 4-core	5 m	**8040456**	**NEBC-LE4-ES-5-D12G4-ET**
Plug for power supply					
	Socket M12x1, 5-pin			**8162291**	**NECB-M12G5-C2**
Connecting cable for power supply					
	• Socket M12x1, 5-pin • Plug M12x1, 5-pin	Suitable for energy chains, straight socket	5 m	**574321**	**NEBU-M12G5-E-5-Q8N-M12G5**
			7.5 m	**574322**	**NEBU-M12G5-E-7.5-Q8N-M12G5**
			10 m	**574323**	**NEBU-M12G5-E-10-Q8N-M12G5**
		Standard, angled socket	0.5 m	**570733**	**NEBU-M12W5-K-0.5-M12W5**
				8003617	**NEBU-M12G5-K-0.5-M12W5**
			2 m	**570734**	**NEBU-M12W5-K-2-M12W5**
				8003618	**NEBU-M12G5-K-2-M12W5**
Cover cap					
	For plugging female threads M12x1			**165592**	**ISK-M12**
Inscription label holder					
	5 frames with 40 pieces each			**565306**	**ASLR-C-E4**

Datasheet – CTEU-CP

The bus node handles communication between the valve terminal and a higher-order CPI master.

The module has basic diagnostic functions. It has 6 integrated LEDs for on-site display. A maximum of 4 byte inputs and 4 byte outputs are transmitted in the cyclic process image.



Application

The bus node CTEU-CP provides two CPI interfaces.
The connections are marked as IN and OUT.

Installation

Direct integration

- Mounting the bus node on an I-Port device, e.g. valve terminal
- One I-Port interface available (for internal communication)
- In this case, the connection with the device is established via a 5-pin, A-coded M12 flange socket.

Adapter CAPC

- Mounting the bus node on the adapter
- Two I-Port interfaces available on the adapter
- If the bus node is used on an adapter CAPC, the two I-Ports are connected electrically via an 8-pin socket strip.

Power supply

The power is supplied to the bus node and the connected I-Port devices via an M9 plug, 5-pin (In) and an M9 socket, 5-pin (Out) on the top side of the housing.

Both the plug and the socket have a metal thread.

General technical data		
Fieldbus interface		
Protocol		CPI-B
		CP installation system
Transmission rate	[Mbps]	100
Fieldbus interface		Socket, M9x0.5, 5-pin
Internal cycle time		2 ms per 2 byte of user data
Inputs/outputs		
Max. address volume inputs	[byte]	4
Max. address volume for outputs	[byte]	4

Technical data – Electrics		
Nominal operating voltage	[V DC]	24
Operating voltage range	[V DC]	18 ... 30
Intrinsic current consumption at nominal operating voltage	[mA]	Typically 50
Max. power supply	[A]	3.4

Datasheet – CTEU-CP

General data		
Device-specific diagnostics		System diagnostics
		Undervoltage
		Communication error
Parameterisation		Diagnostic behaviour
		Fail-safe response
Control elements		DIL switches
LED indicator	Product-specific	PS: Operating voltage for electronics and load supply
		X1: System status of module at I-Port 1
		X2: System status of module at I-Port 2
	Fieldbus-specific	RUN: Communication OK

Technical data – Mechanical components		
Product weight	[g]	105
Dimensions W x L x H	[mm]	40 x 91 x 50


Materials	
Housing	PA
Note on materials	RoHs-compliant
LABS (PWIS) conformity	VDMA24364-Zone III

Operating and environmental conditions		
Ambient temperature	[°C]	0 ... 50
Storage temperature	[°C]	–20 ... +70
Corrosion resistance class CRC[1)]		2
CE marking (see declaration of conformity)[3)]		To EU EMC Directive[2)]
		To EU RoHS Directive
UKCA marking (see declaration of conformity)[3)]		To UK EMC regulations[2)]
		To UK RoHS regulations
KC marking		KC EMC
Certification		c UL us - Listed (OL)
		RCM
Degree of protection		IP65/IP67

1) More information www.festo.com/x/topic/crc
2) For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... d Support/Downloads.
If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.
3) More information www.festo.com/catalogue/... → Support/Downloads.



Datasheet – CTEU-CP

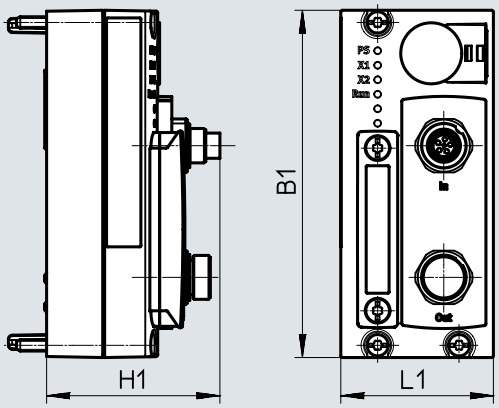Dimensions Download CAD data ➔ www.festo.com




Type	L1	H1	B1
CTEU-CP	40	45.4	91

Pin assignment


	Pin	Assignment	Description
Fieldbus interface M9, 5-pin			
Incoming 	1	$24V_{EL/SEN}$	24 V DC operating voltage supply (PS) internal electronics and I-Port devices
	2	$24V_{VAL/OUT}$	24 V DC load voltage supply (PL) I-Port devices
	3	$0V_{EL/SEN}$	0 V operating voltage supply and load voltage supply
	4	CAN+	Received/transmitted data high
	5	CAN-	Received/transmitted data low
	Thread	FE	Functional earth/shielding
Outgoing 	1	$24V_{EL/SEN}$	24 V DC operating voltage supply (PS) internal electronics and I-Port devices
	2	$24V_{VAL/OUT}$	24 V DC load voltage supply (PL) I-Port devices
	3	$0V_{EL/SEN}$	0 V operating voltage supply and load voltage supply
	4	CAN+	Received/transmitted data high
	5	CAN-	Received/transmitted data low
	Thread	FE	Functional earth/shielding

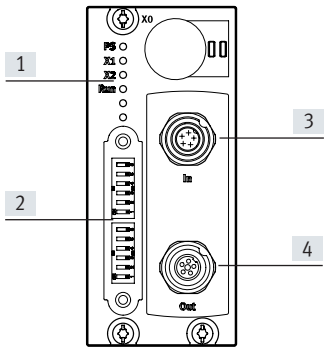Connection and display components




[1] Status LED (operating status/diagnostics)
[2] DIL switch
[3] Fieldbus interface incoming IN
[4] Fieldbus interface outgoing OUT

Accessories – CTEU-CP

Ordering data			Part no.	Type
Bus node				
	Bus node CTEU-CP	For installation system CPI	**2149714**	**CTEU-CP**

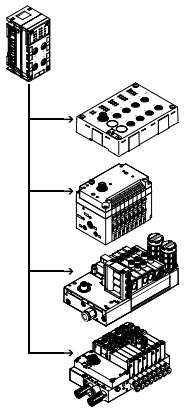Datasheet – Interface CPX-CTEL



The electrical interface CPX CTEL master establishes the connection to modules of the CTEL/CTEU series that have an I-Port interface (device). The I/O data from the connected devices are transmitted to the connected CPX bus node and thus to the higher-order controller via fieldbus.
A maximum of 4 devices can be connected to a CPX CTEL master via corresponding M12 interfaces.



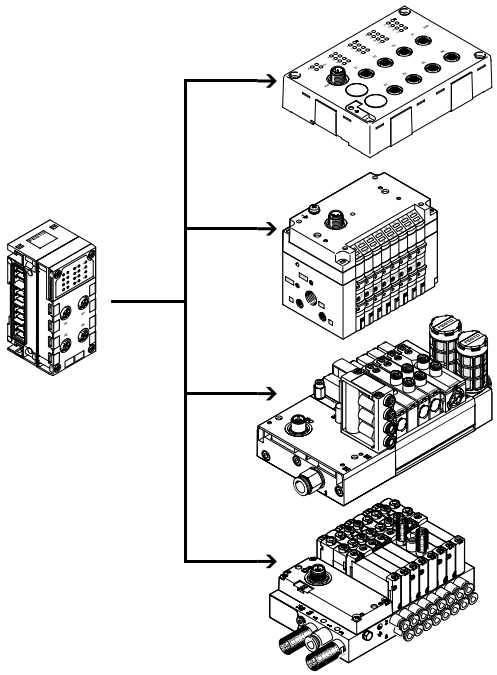
Application

I-Port interface

As well as transmitting the communication data, the I-Port interfaces of a CPX CTEL master also transmit the power supply to the connected sensors and the load supply to the valves (or outputs).
Both circuits are supplied separately with 24 V, using a separate ground.

The connecting cables used must meet the increased requirements resulting from the dual function as signal cable and supply cable.

Configuration example – CPX CTEL master with CTEL modules



The CPX CTEL master provides 4 external I-Port interfaces, each of which can be connected with a device. I-Port is an interface for exchanging serial data for connecting decentralised modules or valve terminals from Festo. The I-Port interface is based on IO-Link® and is compatible with it in certain areas.
The connection type corresponds to a star topology. In other words, only one module or one valve terminal can be connected to each I-Port.

The restrictions compared to IO-Link® include:

- Permanently set baud rate of 230.4 kbps
- SIO mode is not supported
- Max. 32 bytes of input data and 32 bytes of output data
- Only one extract of the master commands is used
- Festo plug & work principle, configuration via IODD is not supported.

Datasheet – Interface CPX-CTEL

Implementation

The CPX CTEL master from Festo enables modules with an I-Port interface to be connected to a CPX system:
- Max. 4 devices with individual electronic protection
- Max. 64 inputs/64 outputs per I-Port interface
- The maximum length of a string is 20 m.

The following device variants are available:
- Input modules with 16 digital inputs (connection technology M8 3-pin and M12 5-pin)
- Valve terminals with I-Port interface (up to 48 solenoid coils, different valve functions)

The decentralised layout of the modules and valve terminals with I-Port enables them to be mounted close to the cylinders and actuators or sensors to be controlled. This means that the compressed air supply lines and sensor cables used can be shortened, and it may be possible to use smaller valves, thereby saving costs.
Several CPX CTEL masters can be combined in one CPX terminal, depending on the address capacity of the bus node.
Example:
- CPX-FB13 (512 I/O)
- The maximum number of CPX CTEL masters is 2 (each with 256 I/O)

Configuration

Settings

The precise number of the I/O bytes made available depends on the requirements of the connected devices or of the relevant selected operating mode.
The operating mode or preset configuration of the CPX CTEL master can be specified by the user.
Selecting the operating mode and setting the manual configuration takes place via the DIL switches. These DIL switches are not required during continuous operation and are only accessible in the disassembled state.

Manual configuration

In the case of manual configuration (tool change mode), the volume of inputs and outputs in the process image of the CPX system or of the higher-level fieldbus can be defined manually using the DIL switches.

The process image then always has the same scope, regardless of the connected devices.
The specified I/O length always applies to all four I-Ports (max. 8 bytes per I-Port).

Automatic configuration

In the case of automatic configuration, the I/O length for each I-Port is determined individually and this value is used to select the appropriate or next highest configuration preset.

Power supply for I-Port devices

The CPX-CTEL master provides two separate power supplies for the connected devices:
- For operating the device and the inputs connected to it
- For the outputs and valves that are connected to the device

The power supply for the devices and the inputs is provided by the power supply for the electronics and sensors of the CPX terminal.
The power supply for the outputs and valves is provided by the power supply for the valves of the CPX terminal.
The interlinking block with additional supply ensures a separate supply voltage for the valves and outputs. This means it is possible to disconnect this supply voltage separately.
The valves and outputs of the connected I-Port devices can therefore be disconnected separately without disconnecting the devices.

Datasheet – Interface CPX-CTEL


General technical data			
Type			CPX-CTEL-4-M12-5POL
Protocol			I-Port
Maximum address capacity	Outputs	[bit]	256
	Inputs	[bit]	256
I-Port connection			4x socket M12, 5-pin, A-coded
Number of I-Port interfaces			4
Maximum cable length		[m]	20
Internal cycle time		[ms]	1 per 8 bits of user data
Galvanic isolation	Channel – channel		No
	Channel – internal bus		Yes, with intermediate air supply
LED indicators			X1 ... 4 = Status of the I-Port interface 1 ... 4 PS = Electronic supply PL = Load supply - ↳ - = Module error
Diagnostics			• Communication error • Module short circuit • Module-oriented diagnostics • Undervoltage
Parameterisation			• Diagnostic behaviour • Fail-safe per channel • Forcing per channel • Idle mode per channel • Module parameters • Tool change mode
Additional functions			Tool change mode
Control elements			DIL switches
Operating voltage	Nominal width	[V DC]	24 (reverse polarity protected)
	Permissible range	[V DC]	18 ... 30
	Power failure buffering	[ms]	10
Intrinsic current consumption at nominal operating voltage		[mA]	Typically 65
Max. power supply per channel		[A]	4x 1.6
Max. residual current of outputs per channel		[A]	4x 1.6
Degree of protection to EN 60529			IP65/IP67
Temperature range	Operation	[°C]	–5 ... +50
	Storage/transport	[°C]	–20 ... +70
Materials			Reinforced PA, PC
Note on materials			RoHs-compliant
Grid dimension		[mm]	50
Dimensions (including interlinking block) W x L x H		[mm]	50 x 107 x 55
Product weight		[g]	110

Note


Please observe the general limits and guidelines for the system when configuring the electric modules.

Datasheet – Interface CPX-CTEL

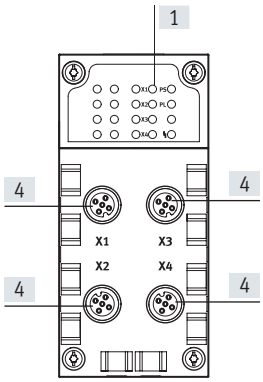
Connection and display components



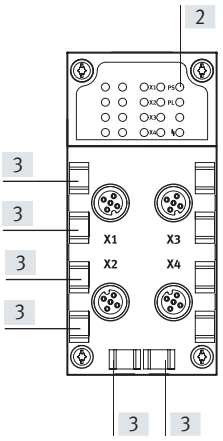[1] Status LEDs for I-Port interfaces
[2] CPX-specific status LEDs
[3] Holders for inscription labels (IBS 6x10)
[4] I-Port interfaces for up to 4 devices




Pin assignment – I-Port interface/IO-Link®



Pin	Assignment	Description
1	$24V_{EL/SEN}$	Operating voltage supply (electronics, sensors/inputs)
2	$24V_{VAL/OUT}$	Load voltage supply (valves/outputs)
3	$0V_{EL/SEN}$	Operating voltage supply (electronics, sensors/inputs)
4	C/Q	Data communication
5	$0V_{VAL/OUT}$	Load voltage supply (valves/outputs)




Dimensions

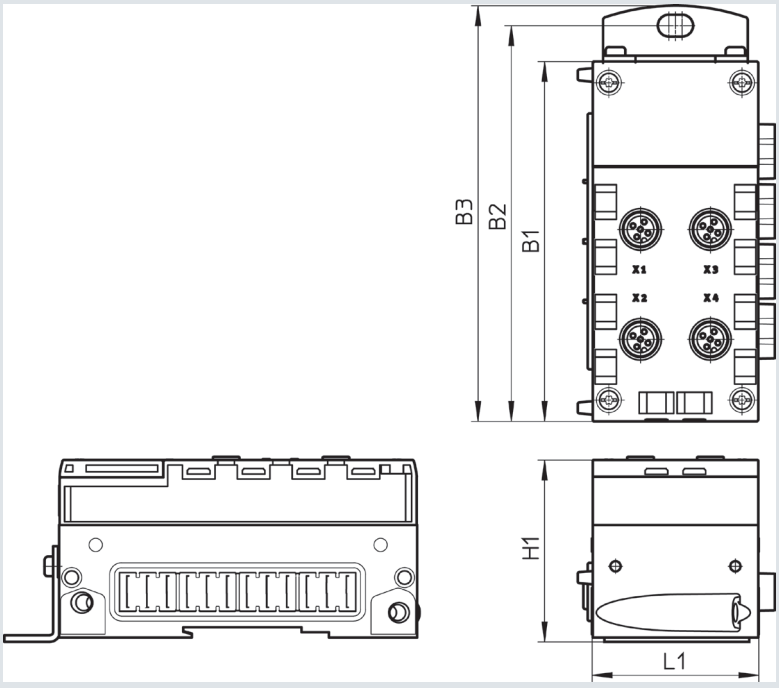Download CAD data ➔ www.festo.com




Type	B1	B2	B3	H1	L1
CPX-CTEL-4-M12-5POL	108.1	118.9	124.9	55.1	50


Accessories – Interface CPX-CTEL

Ordering data Designation				Part no.	Type
CPX CTEL master					
	Interface for a maximum of 4 I/O modules and valve terminals with I-Port interface (devices)			**1577012**	**CPX-CTEL-4-M12-5POL**
Bus connection					
	Cover cap M12			**165592**	**ISK-M12**
	Inscription label holder for connection block			**536593**	**CPX-ST-1**
Connecting cable					
	Straight – angled	Suitable for energy chains	5 m	**574321**	**NEBU-M12G5-E-5-Q8N-M12G5**
			7.5 m	**574322**	**NEBU-M12G5-E-7.5-Q8N-M12G5**
			10 m	**574323**	**NEBU-M12G5-E-10-Q8N-M12G5**
	Angled – angled	Standard	0.5 m	**570733**	**NEBU-M12W5-K-0.5-M12W5**
	Straight – angled			**8003617**	**NEBU-M12G5-K-0.5-M12W5**
	Angled – angled		2 m	**570734**	**NEBU-M12W5-K-2-M12W5**
	Straight – angled			**8003618**	**NEBU-M12G5-K-2-M12W5**
User documentation					
	User documentation for CPX CTEL master	German		**574600**	**CPX-CTEL-4-M12-5POL-DE**
		English		**574601**	**CPX-CTEL-4-M12-5POL-EN**
		Spanish		**574602**	**P.BE-CPX-CTEL-ES**
		French		**574603**	**P.BE-CPX-CTEL-FR**
		Italian		**574604**	**P.BE-CPX-CTEL-IT**

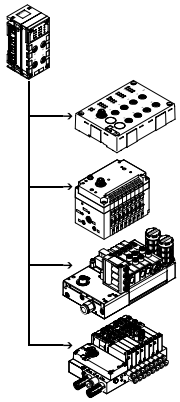Datasheet – Interface CPX-CTEL-2



The electrical interface CPX CTEL master establishes the connection to modules of the CTEL/CTEU series that have an I-Port interface (device). The I/O data from the connected devices are transmitted to the connected CPX bus node and thus to the higher-order controller via fieldbus.
A maximum of two IO-Link devices can be connected to an electrical interface CPX-CTEL-2-... via the corresponding M12 interfaces.

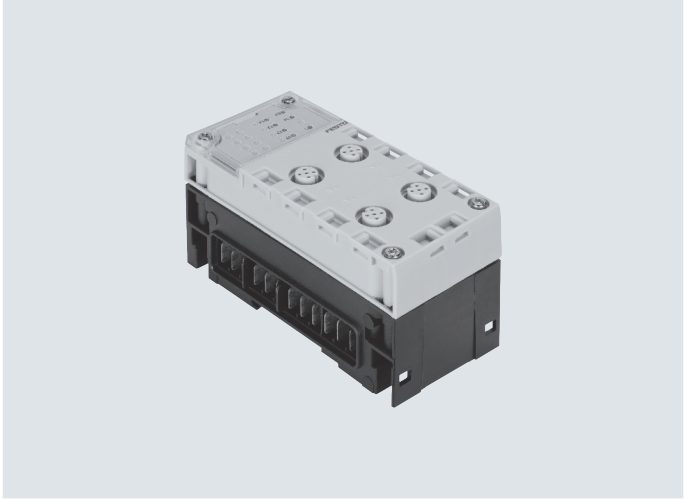

Application

IO-Link® interface

The communication system IO-Link® is used to exchange serial data from decentralised function modules (devices) at the field level.
The electrical interface CPX-CTEL-2-... provides two external IO-Link® interfaces, each of which can be connected to a device.
The connection type corresponds to a star topology, which means that only one device can be connected to each port.
The address space that the module makes available and assigns accordingly in the CPX system can be configured according to various presets.
Selecting the operating mode and setting the manual configuration takes place via the DIL switches. These DIL switches are not required during continuous operation and are only accessible in the disassembled state.

Constraints

The interfaces (ports) of electrical interface CPX-CTEL-2-... support the connection of IO-Link® devices with few limitations.

- The process data length of the inputs and outputs is limited to 16 bytes each per port
- The driver strength on the C/Q line is limited to 250 mA
- SIO mode is not supported

The electrical interface CPX-CTEL-2-... provides two separate power supplies for the connected devices:
- For operating the device and the inputs connected to it
- For the outputs and valves that are connected to the device

The power supply for the devices and the inputs is provided by the power supply for the electronics and sensors of the CPX terminal.
The power supply for the outputs and valves is provided by the power supply for the valves of the CPX terminal.
The interlinking block with additional supply ensures a separate supply voltage for the valves and outputs. This means it is possible to disconnect this supply voltage separately.
The valves and outputs of the connected I-Port devices can therefore be disconnected separately without disconnecting the devices.

Datasheet – Interface CPX-CTEL-2


General technical data			
Type			CPX-CTEL-2-M12-5POL-LK
Protocol			IO-Link®, master version V 1.0
Maximum address volume	Outputs	[bit]	256
	Inputs	[bit]	256
I-Port connection			2x socket M12, 5-pin, A-coded
Number of IO-Link® interfaces			2
Maximum cable length		[m]	20
Internal cycle time		[ms]	1 per 8 bits of user data
Galvanic isolation	Channel – channel		No
	Channel – internal bus		Yes, with intermediate air supply
LED indicators			X1 ... 2 = Status of the IO-Link® interface 1 ... 2 PS = Electronic supply PL = Load supply - ↳ - = Module error
Diagnostics			• Communication error • Module short circuit • Module-oriented diagnostics • Undervoltage
Parameterisation			• Diagnostic behaviour • Fail-safe per channel • Forcing per channel • Idle mode per channel • Module parameters
Control elements			DIL switches
Operating voltage	Nominal width	[V DC]	24 (reverse polarity protected)
	Permissible range	[V DC]	18 ... 30
	Power failure buffering	[ms]	10
Intrinsic current consumption at nominal operating voltage		[mA]	Typically 65
Max. power supply per channel		[A]	2x 1.6
Max. residual current of outputs per channel		[A]	2x 1.6
Degree of protection to EN 60529			IP65, IP67
Temperature range	Operation	[°C]	–5 ... +50
	Storage/transport	[°C]	–20 ... +70
Materials			Reinforced PA, PC
Note on materials			RoHs-compliant
Grid dimension		[mm]	50
Dimensions (including interlinking block) W x L x H		[mm]	50 x 107 x 55
Product weight		[g]	110

Note


Please observe the general limits and guidelines for the system when configuring the electric modules.

Datasheet – Interface CPX-CTEL-2

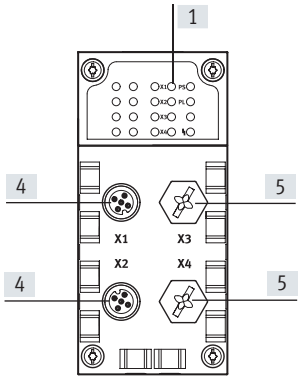
Connection and display components



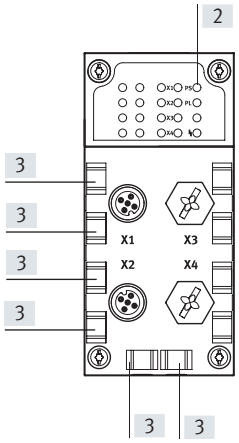[1] Status LEDs for I-Port interfaces
[2] CPX-specific status LEDs
[3] Holders for inscription labels (IBS 6x10)
[4] IO-Link® interfaces for up to 2 devices
[5] Unused connections




Pin allocation – IO-Link interface

Terminal assignment	Pin	Signal	Designation
	1	24 V_{SEN}	24 V DC supply voltage for electronics and inputs
	2	24 V_{VAL}	24 V DC load voltage supply for valves and outputs
	3	0 V_{SEN}	0 V DC supply voltage for electronics and sensors
	4	C/$Q_{I\text{-}Port}$	Communication signal C/Q, data transmission line
	5	0 V_{VALVES}	0 V DC load voltage supply for valves and outputs




Dimensions

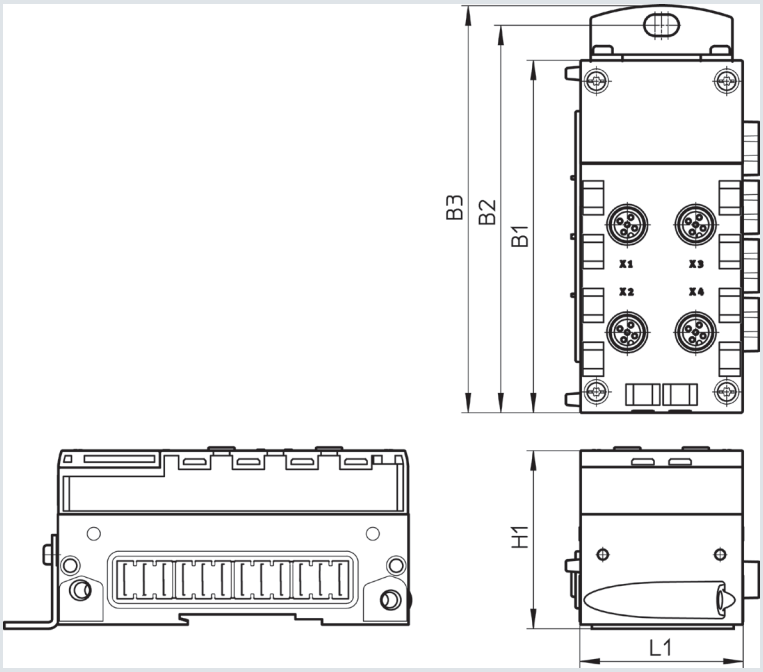Download CAD data ➔ www.festo.com



Type	B1	B2	B3	H1	L1
CPX-CTEL-2-M12-5POL-LK	108.1	118.9	124.9	55.1	50


Accessories – Interface CPX-CTEL-2

Ordering data Designation			Part no.	Type
CPX CTEL master, IO-Link®				
	Interface for max. 2 I/O modules and valve terminals with IO-Link® interface (devices)		**2900543**	**CPX-CTEL-2-M12-5POL-LK**
Bus connection				
	Cover cap	M12	**165592**	**ISK-M12**
	Connecting cable M12-M12, 5-pin, straight plug-straight socket	5 m	**574321**	**NEBU-M12G5-E-5-Q8N-M12G5**
		7.5 m	**574322**	**NEBU-M12G5-E-7.5-Q8N-M12G5**
		10 m	**574323**	**NEBU-M12G5-E-10-Q8N-M12G5**
	Inscription label holder for connection block		**536593**	**CPX-ST-1**
User documentation				
	User documentation for CPX CTEL master	German	**8034115**	**CPX-CTEL-2-M12-5POLLK-DE**
		English	**8034116**	**CPX-CTEL-2-M12-5POLLK-EN**

Datasheet – Valve terminal VTSA

IO-Link® interface for communication between a valve terminal VTSA and an IO-Link® master. It activates a valve terminal VTSA with up to 32 solenoid coils on max. 16 valve positions.

The connection to a higher-order controller can be achieved by:
- Connection to an I-Port master from Festo (CPX-CTEL)
- Direct mounting of a bus node CTEU
- Connection to an IO-Link® master (in IO-Link® mode)



General technical data		
Types of communication		IO-Link®
IO-Link®, connection technology		Device, 5-pin
IO-Link®, protocol version		Device V 1.1
IO-Link®, communication mode		COM2.
IO-Link®, port class		Device B
IO-Link®, number of ports		Device 1
IO-Link®, proc. data width OUT		Device 1-4 byte
IO-Link®, minimum cycle time		Device 3.2 ms
Baud rate	[kbps]	38.4
Intrinsic current consumption of electronics/sensors	[mA]	Typ. 30
Intrinsic current consumption of load	[mA]	Typ. 30
Max. number of solenoid coils		32
Max. number of valve positions		16
Residual ripple	[Vss]	4
Reverse polarity protection		Separate for power system (PS) and power load (PL)
Nominal conductor cross-section	[mm²]	1
Max. cable length	[m]	20
Nominal operating voltage DC	[V]	24
Product weight	[g]	690

Materials	
Note on materials	RoHs-compliant
LABS (PWIS) conformity	VDMA24364-B2-L

Operating and environmental conditions	
Corrosion resistance class CRC1)	2

1) More information www.festo.com/x/topic/crc


LED indicator

	Colour	Status	Function
Status LED X1	Red/green	Off	–
		Static green	Normal operating status
		Flashing green	Communication error
		Flashing red/green	Load supply error (undervoltage or no-load supply)
		Static red	Load supply error and communication error

Datasheet – Valve terminal VTSA


Connection and display components

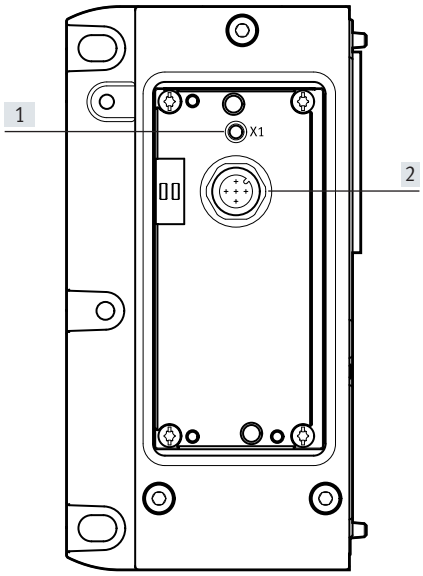VABA-S6-1-PT



[1] Status LED
[2] I-Port interface/IO-Link®

Pin assignment – I-Port interface/IO-Link®




Pin	Assignment	Description
1	$24V_{EL/SEN}$	Supply, power system
2	$24V_{VAL/OUT}$	Load supply, power load
3	$0V_{EL/SEN}$	Supply, power system
4	C/Q	Communication signal
5	$0V_{VAL/OUT}$	Load supply, power load

Dimensions

Download CAD data ➔ www.festo.com



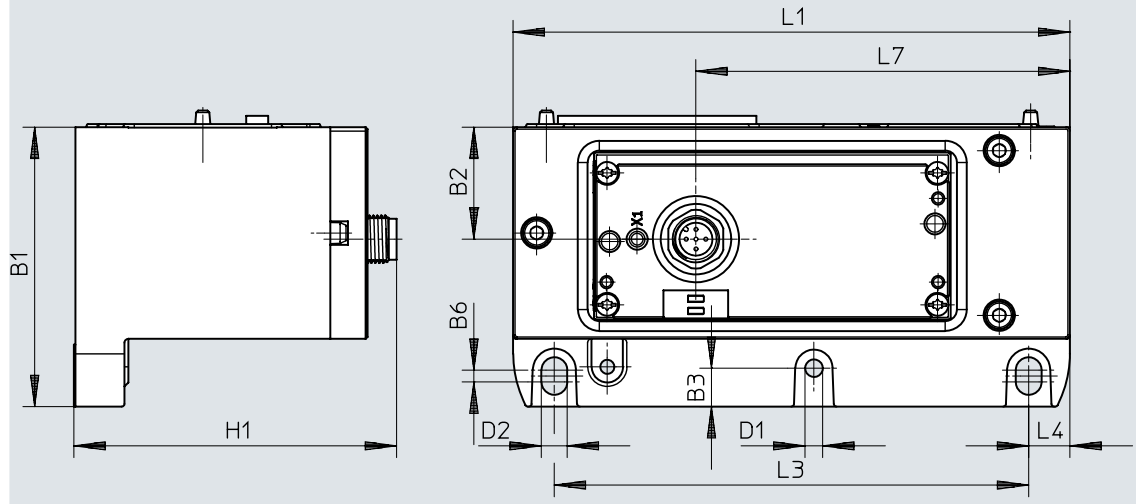
Outlet on top



Type	B1	B2	B3	B6	D1 Ø	D2 Ø	H1	L1	L3	L4	L7
VABA-S6-1-PT	71.3	28.6	9.8	3	4.5	6.6	82.3	142	121	10.5	95.4

Datasheet – Valve terminal VTSA

Accessories

	Description			Part no.	Type
	Electrical interface for IO-Link®/I-Port			**8152353**	**VABA-S6-1-PT**
Connection technology for IO-Link®					
	T-adapter M12, 5-pin for IO-Link® and load voltage supply			**171175**	**FB-TA-M12-5POL**
Straight plug, for IO-Link®					
	Straight plug, M12, 5-pin (for T-adapter)			**8162296**	**NECB-S-M12G5-C2**
Y-distributor for IO-Link®					
	Y-distributor with cable on controller side, M12x1 A-coded, for IO-Link®			**8091516**	**NEDU-L1R2-M12G5-M12LE-1R**
Inscription label for IO-Link®					
	Frame with 40 labels			**565306**	**ALSR-C-E4**
Connecting cable					
	Straight – angled	Suitable for energy chains	5	**574321**	**NEBU-M12G5-E-5-Q8N-M12G5**
			7.5	**574322**	**NEBU-M12G5-E-7.5-Q8N-M12G5**
			10	**574323**	**NEBU-M12G5-E-10-Q8N-M12G5**
	Angled – angled	Standard	0.5 m	**570733**	**NEBU-M12W5-K-0.5-M12W5**
	Straight – angled			**8003617**	**NEBU-M12G5-K-0.5-M12W5**
	Angled – angled		2 m	**570734**	**NEBU-M12W5-K-2-M12W5**
	Straight – angled			**8003618**	**NEBU-M12G5-K-2-M12W5**

Datasheet – Valve terminals CPV

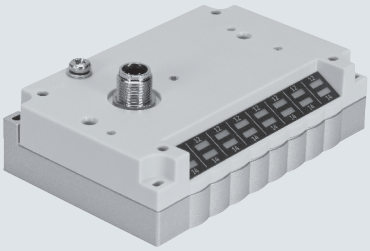
- Flow rate
  CPV10: up to 400 l/min
  CPV14: up to 800 l/min

- Valve width
  CPV10: 10 mm
  CPV14: 14 mm

- Voltage
  24 V DC

- Repair service

I-Port interface for communication between a valve terminal CPV and an I-Port master. It activates a valve terminal CPV with up to 16 solenoid coils on max. 8 valve positions.
The connection to a higher-order controller can be achieved by:
- Connection to an I-Port master from Festo (CPX-CTEL)
- Direct mounting of a bus node CTEU
- Connection to an IO-Link® master (in IO-Link® mode)



General technical data			
Protocol			IO-Link®/I-Port
IO-Link®	Connection technology		5-pin
	Protocol		V 1.0
	Communication mode		COM2 (38.4 kBaud), COM3 (230 kBaud)
	Port type		B
	Number of ports		1
	Process data width OUT	[bit]	16
	Minimum cycle time	[ms]	3.2
Baud rate		[kbps]	38.4/230.4
Maximum number of valve positions			8
Nominal operating voltage		[V DC]	24
Nominal load voltage		[V DC]	24
Operating voltage range	Electronics/sensors	[V DC]	18 ... 30
	Load voltage	[V DC]	21.6 ... 26.4
Intrinsic current consumption	Operating voltage	[mA]	35
	Load voltage	[mA]	700
Reverse polarity protection			For operating voltage
Diagnostics			Undervoltage in load voltage supply
LED indicator	Bus-specific		1 communication status
	Product-specific		16 valve status

Materials	
Housing	Aluminium
	PA
Seal	NBR
Thread	Brass
Cover	PA
Note on materials	RoHs-compliant

Operating and environmental conditions		
Mounting position		Any
Degree of protection to EN 60529		IP65 (when fully plugged in or fitted with protective cover)
Ambient temperature	[°C]	–5 ... +50
Storage temperature	[°C]	–20 ... +70
Relative humidity	[%]	93 (non-condensing)
CE marking (see declaration of conformity)		To EU EMC Directive[1)]
KC marking		KC EMC


1) For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... d Support/Downloads.
If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Datasheet – Valve terminals CPV

ATEX	
ATEX category for gas	II 3G
Type of (ignition) protection for gas	Ex ec IIC Gc X
Explosion protection certification outside the EU	EPL Gc (GB)


Connection and display components

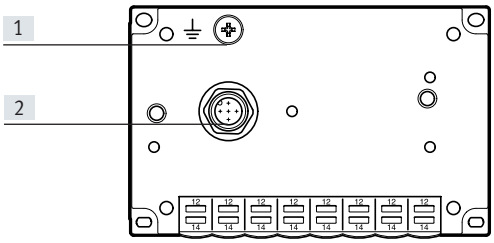CPV10




[1] Earthing screw
[2] I-Port interface/IO-Link®

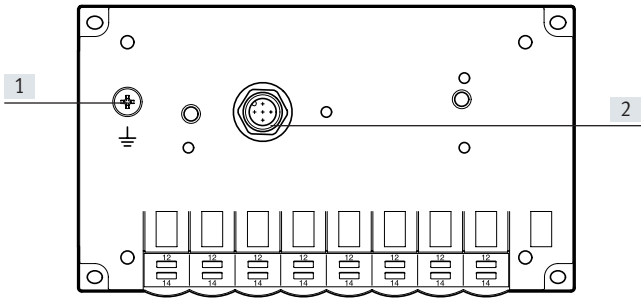CPV14



[1] Earthing screw
[2] I-Port interface/IO-Link®


Pin assignment – I-Port interface/IO-Link®



Pin	Assignment	Description
1	$24V_{EL/SEN}$	Operating voltage supply (electronics, sensors/inputs)
2	$24V_{VAL/OUT}$	Load voltage supply (valves/outputs)
3	$0V_{EL/SEN}$	Operating voltage supply (electronics, sensors/inputs)
4	C/Q	Data communication
5	$0V_{VAL/OUT}$	Load voltage supply (valves/outputs)

Dimensions



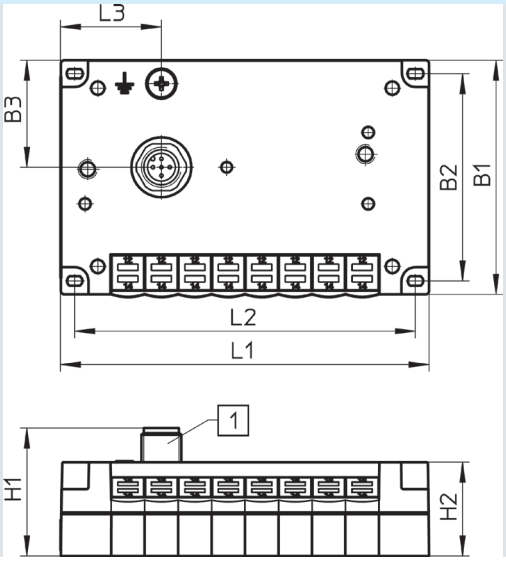
Download CAD data ➔ www.festo.com



[1] I-Port interface/IO-Link®

Type	B1	B2	B3	H1	H2	L1	L2	L3
CPV10-GE-PT-8	71	62	32	38.3	26.2	110	101.8	30.2
CPV14-GE-PT-8	89	78	32.4	38.3	26.2	152	142	56.5

Accessories – Valve terminals CPV

Ordering data					Part no.	Type
I-Port bus node						
	Bus node with I-Port interface/IO-Link® and 8 valve positions (maximum 8 double solenoid valves)	CPV10	Device ID: 0x 000410	108.5 g	**1565761**	**CPV10-GE-PT-8**
		CPV14	Device ID: 0x 000510	200 g	**1564984**	**CPV14-GE-PT-8**
Connection technology for IO-Link®						
	T-adapter M12, 5-pin for IO-Link® and load voltage supply				**171175**	**FB-TA-M12-5POL**
	Straight plug, M12, 5-pin (for T-adapter)				**8162296**	**NECB-S-M12G5-C2**
Connecting cable						
	Straight – angled	Suitable for energy chains		5	**574321**	**NEBU-M12G5-E-5-Q8N-M12G5**
				7.5	**574322**	**NEBU-M12G5-E-7.5-Q8N-M12G5**
				10	**574323**	**NEBU-M12G5-E-10-Q8N-M12G5**
	Angled – angled	Standard		0.5 m	**570733**	**NEBU-M12W5-K-0.5-M12W5**
	Straight – angled				**8003617**	**NEBU-M12G5-K-0.5-M12W5**
	Angled – angled			2 m	**570734**	**NEBU-M12W5-K-2-M12W5**
	Straight – angled				**8003618**	**NEBU-M12G5-K-2-M12W5**

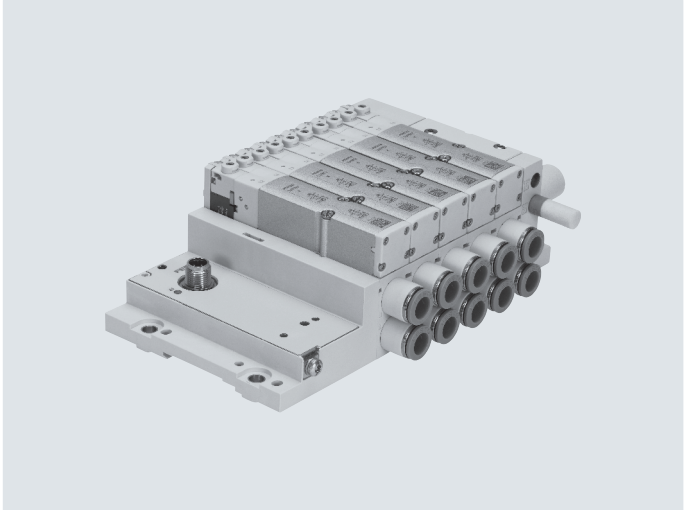
Datasheet – Valve terminals MPA-L

- Flow rate
  VMPA1: up to 360 l/min
  VMPA14: up to 670 l/min
  VMPA2: up to 700 l/min

- Valve width
  VMPA1: 10 mm
  VMPA14: 14 mm
  VMPA2: 20 mm

- Voltage
  24 V DC

I-Port interface for communication between a valve terminal MPA-L and an I-Port master. It activates a valve terminal MPA-L with up to 32 solenoid coils on max. 32 valve positions.
The connection to a higher-order controller can be achieved by:
- Connection to an I-Port master from Festo (CPX-CTEL)
- Direct mounting of a bus node CTEU
- Connection to an IO-Link® master (in IO-Link® mode)



General technical data

Protocol			IO-Link®/I-Port
IO-Link®	Connection technology		5-pin
	Protocol		V 1.0
	Communication mode		COM2 (38.4 kBaud), COM3 (230 kBaud)
	Port type		B
	Number of ports		1
	Process data width OUT	[bit]	8 ... 32
	Minimum cycle time	[ms]	3.2
Baud rate		[kbps]	38.4/230.4
Operating pressure		[bar]	–0.9 ... 10
Pilot pressure		[bar]	3 ... 8
Nominal operating voltage		[V DC]	24
Intrinsic current consumption	Operating voltage	[mA]	30
	Load voltage	[mA]	30
Reverse polarity protection			For operating voltage
Diagnostics			Undervoltage in load voltage supply
LED indicator			1 communication status

Materials

End plate	Reinforced PPA
Note on materials	RoHs-compliant

Operating and environmental conditions


Mounting position		Any
Ambient temperature	[°C]	–5 ... +50
Storage temperature	[°C]	–20 ... +40
Corrosion resistance class CRC[1)]		3

1) More information www.festo.com/x/topic/crc

Datasheet – Valve terminals MPA-L


Connection and display components

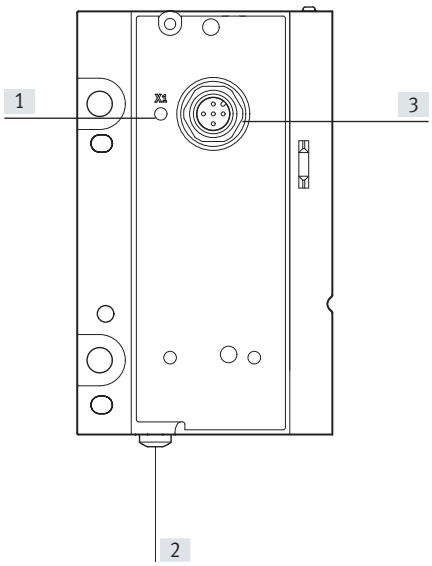VMPAL-EPL-IPO32



[1] Status LED
[2] Earthing screw
[3] I-Port interface/IO-Link®


Pin assignment – I-Port interface/IO-Link®



Pin	Assignment	Description
1	$24V_{EL/SEN}$	Operating voltage supply (electronics, sensors/inputs)
2	$24V_{VAL/OUT}$	Load voltage supply (valves/outputs)
3	$0V_{EL/SEN}$	Operating voltage supply (electronics, sensors/inputs)
4	C/Q	Data communication
5	$0V_{VAL/OUT}$	Load voltage supply (valves/outputs)

Dimensions


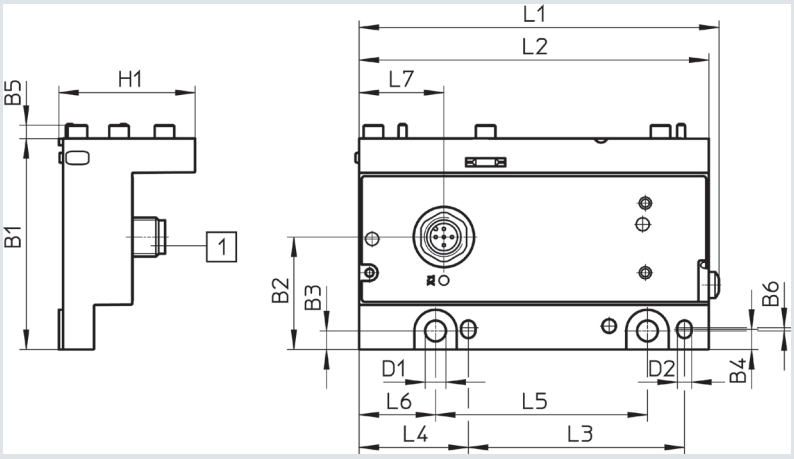
Download CAD data ➔ www.festo.com



[1] I-Port interface/IO-Link®

Type	B1	B2	B3	B4	B5	B6	D1	D2	H1	L1	L2	L3	L4	L5	L6	L7
VMPAL-EPL-IPO32	64.8	34.5	5.7	6.2	4	1	6.4	4.5	41.8	110	107	66.3	33.5	65	23.5	26

Accessories – Valve terminals MPA-L

Ordering data				Part no.	Type
I-Port bus node					
	Bus node with I-Port interface/IO-Link® and up to 32 valve positions (maximum 16 double solenoid valves)	Device ID: 0x 000620	170 g	**575667**	**VMPAL-EPL-IPO32**
Connection technology for IO-Link®					
	T-adapter M12, 5-pin for IO-Link® and load voltage supply			**171175**	**FB-TA-M12-5POL**
	Straight plug, M12, 5-pin (for T-adapter)			**8162296**	**NECB-S-M12G5-C2**
Connecting cable					
	Straight – angled	Suitable for energy chains	5 m	**574321**	**NEBU-M12G5-E-5-Q8N-M12G5**
			7.5 m	**574322**	**NEBU-M12G5-E-7.5-Q8N-M12G5**
			10 m	**574323**	**NEBU-M12G5-E-10-Q8N-M12G5**
	Angled – angled	Standard	0.5 m	**570733**	**NEBU-M12W5-K-0.5-M12W5**
	Straight – angled			**8003617**	**NEBU-M12G5-K-0.5-M12W5**
	Angled – angled		2 m	**570734**	**NEBU-M12W5-K-2-M12W5**
	Straight – angled			**8003618**	**NEBU-M12G5-K-2-M12W5**

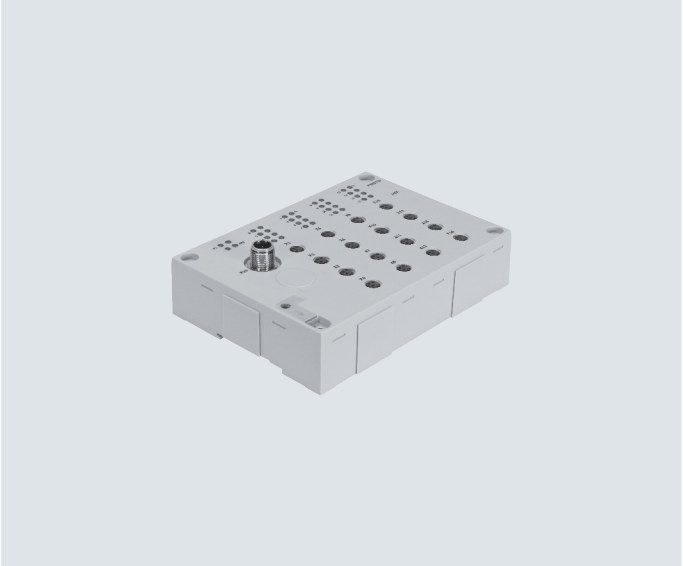
Datasheet – Input modules CTSL

Function

Digital input modules make it easier to connect proximity switches or other 24 V DC sensors (inductive, capacitive, etc.).
Plugs with double allocation are separated using a DUO plug or DUO cable.

Area of application

- Input modules for 24 V DC sensor signals
- M12 connection technology
- Display of the input statuses for each input signal via an assigned LED
- Operating voltage supply 24 V DC for all connected sensors
- Diagnostic LED for short circuit/overload of sensor supply
- Labelling options on all sides with large, hinged inscription label
- Earthing plate and DIN rail mounting already integrated



General technical data

Type			CTSL-D-16E-M8-3	CTSL-D-16E-M12-5
Electrical connection			16x socket, M8, 3-pin	8x socket, M12, 5-pin
Protocol			IO-Link®/I-Port	
IO-Link®	Connection technology		5-pin	
	Protocol		V 1.0	
	Communication mode		COM2 (38.4 kBaud), COM3 (230 kBaud)	
	Port type		B	
	Number of ports		1	
	Process data width OUT	[bit]	16	
	Minimum cycle time	[ms]	3.2	
	Device ID	[ms]	0x 700410	
Baud rate		[kbps]	38.4/230.4	
Max. number of inputs			16	
Nominal operating voltage		[V DC]	24	
Operating voltage range		[V DC]	18 ... 30	
Current consumption at nominal operating voltage of logic circuit		[mA]	Max. 35	
Max. total current per module		[mA]	1.2	
Reverse polarity protection			For operating voltage	
Fuse protection (short circuit)			Internal electronic fuse protection for each group	
Galvanic isolation between channels			No	
Switching level	Signal 0	[V]	≤5	
	Signal 1	[V]	≥11	
Input debounce time		[ms]	0.5 (3 ms, 10 ms, 20 ms parameterisable)	
Input characteristics			IEC 1131-T2	
Switching logic at inputs			PNP (positive switching)	
LED indicator	Bus-specific		X20: I-Port/IO-Link®	
	Product-specific		1 operating voltage	
			16 channel status	
			2 group diagnostics	

Datasheet – Input modules CTSL

Materials			
Housing			Reinforced PA
Cover			Reinforced PA
Note on materials			RoHs-compliant
LABS (PWIS) conformity			VDMA24364-B2-L
Product weight		[g]	250
Dimensions	(W x L x H)	[mm]	143 x 103 x 32


Operating and environmental conditions		
Type of mounting		Either via DIN rail or via through-hole
Degree of protection to EN 60529		IP65/IP67 (when fully plugged in or fitted with protective cover)
Ambient temperature	[°C]	–5 ... +50
Storage temperature	[°C]	–20 ... +70
Corrosion resistance class CRC[1)]		2
CE marking (see declaration of conformity)[2)]		To EU EMC Directive[3)]
		To EU RoHS Directive
UKCA marking (see declaration of conformity)[2)]		To UK EMC regulations[3)]
		To UK RoHS regulations
KC marking		KC EMC
Certification		RCM
		c UL us - Listed (OL)
Certificate-issuing authority		UL E239998

1) More information www.festo.com/x/topic/crc
2) More information www.festo.com/catalogue/... ➔ Support/Downloads.
3) For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... d Support/Downloads.
If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Datasheet – Input modules CTSL


Connection and display components

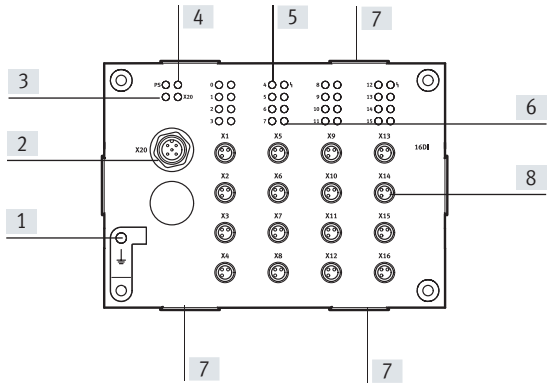CTSL-D-16E-M8-3



[1] Earth connection
[2] I-Port interface/IO-Link®
[3] Status LED for power supply (PS)
[4] Status LED for I-Port (X20)
[5] Status LEDs for inputs (status indication, green)
[6] Status LED (group) for short circuit/overload of sensor supply (red)
[7] Holder for inscription label holder ASCF-H-E2
[8] Sensor connections
(1 input per socket)


Pin assignment – I-Port interface/IO-Link®



Pin	Assignment	Description
1	$24V_{EL/SEN}$	Operating voltage supply (electronics, sensors/inputs)
2	–	–
3	$0V_{EL/SEN}$	Operating voltage supply (electronics, sensors/inputs)
4	C/Q	Data communication
5	–	–

Pin allocation – Sensor connections CTSL-D-16E-M8-3

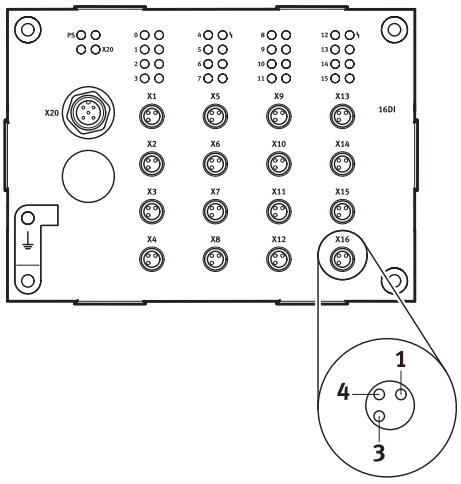Terminal assignment




Pin	Assignment	Description
1	24 V	Operating voltage 24 V
3	0 V	Operating voltage 0 V
4	Ix*	Sensor signal

* Ix = Input x

Datasheet – Input modules CTSL


Connection and display components

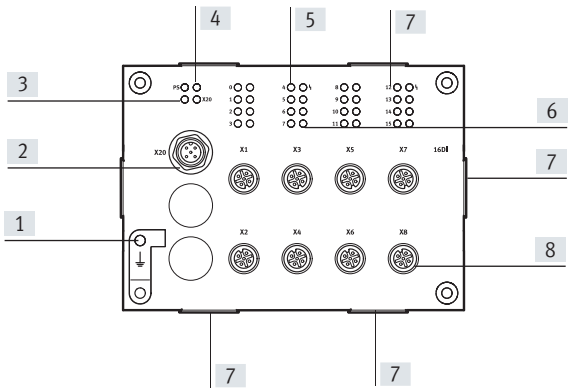CTSL-D-16E-M12-5



[1] Earth connection
[2] I-Port interface/IO-Link®
[3] Status LED for power supply (PS)
[4] Status LED for I-Port (X20)
[5] Status LEDs for inputs (status indication, green)
[6] Status LED (group) for short circuit/overload of sensor supply (red)
[7] Holder for inscription label holder ASCF-H-E2
[8] Sensor connections
(2 inputs per socket)


Pin assignment – I-Port interface/IO-Link®



Pin	Assignment	Description
1	$24V_{EL/SEN}$	Operating voltage supply (electronics, sensors/inputs)
2	–	–
3	$0V_{EL/SEN}$	Operating voltage supply (electronics, sensors/inputs)
4	C/Q	Data communication
5	–	–

Pin allocation – Sensor connections CTSL-D-16E-M12-5

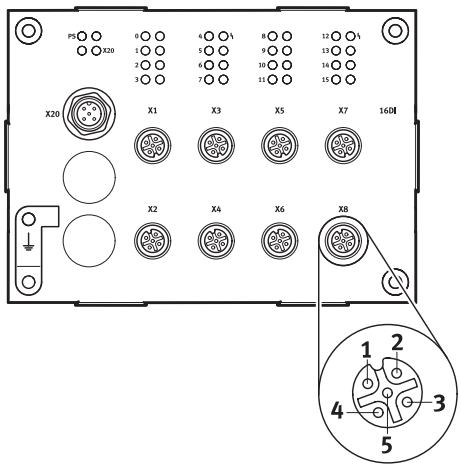Terminal assignment




Pin	Assignment	Description
1	24 V	Operating voltage 24 V
2	Ex+1*	Sensor signal
3	0 V	Operating voltage 0 V
4	Ix*	Sensor signal
5	FE	Functional earth

* Ix = Input x


Datasheet – Input modules CTSL

Dimensions Download CAD data ➔ www.festo.com

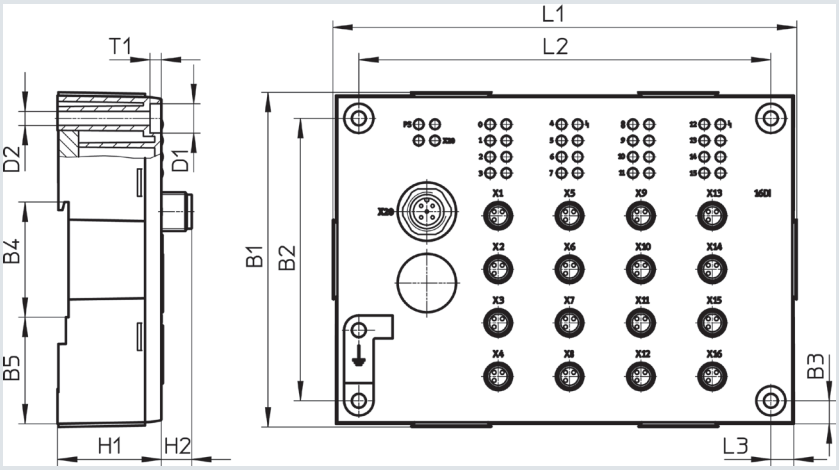CTSL-D-16E-M8-3








CTSL-D-16E-M12-5

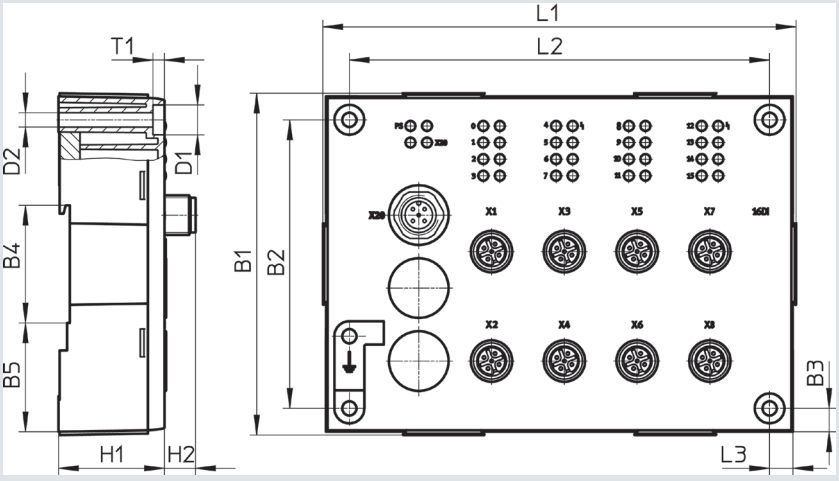

Type	B1	B2	B3	B4	B5	D1	D2	H1	H2	L1	L2	L3	T1
CTSL-D-16E	103	87	7	35.5	32.8	9	4.3	32	9.4	143	127	7	3.5

Accessories – Input modules CTSL


Ordering data Designation			Part no.	Type
Input modules				
	16 sensor connections M8, 3-pin, single allocation		**1387363**	**CTSL-D-16E-M8-3**
	8 sensor connections M12, 5-pin, double allocation		**1387359**	**CTSL-D-16E-M12-5**
Plug connector				
	Straight plug, M12	5-pin	**8162296**	**NECB-S-M12G5-C2**
		4-pin	**8162294**	**NECB-S-M12G4-C2**
	Straight plug connector, M8	3-pin	**8162298**	**NECB-S-M8G3-C2**
	Plug for 2 cables, M12	4-pin	**8162295**	**NECB-S-M12G4-C2-D**
		5-pin	**8162297**	**NECB-S-M12G5-C2-D**
Connecting cables				
	Connecting cable, M12, 4-pin, straight plug-straight socket	2.5 m	**539052**	**NEBU-M12G4-K-2.5-M12G4**[1]
		5.0 m	**539052**	**NEBU-M12G4-K-5-M12G4**[1]
	Connecting cable, M8, 3-pin, straight plug-straight socket	0.5 m	**539052**	**NEBU-M8G3-K-0.5-M8G3**[1]
		1 m	**539052**	**NEBU-M8G3-K-1-M8G3**[1]
		2.5 m	**539052**	**NEBU-M8G3-K-2.5-M8G3**[1]
		5 m	**539052**	**NEBU-M8G3-K-5-M8G3**[1]
	Straight – angled	5 m	**574321**	**NEBU-M12G5-E-5-Q8N-M12G5**
		7 m	**574322**	**NEBU-M12G5-E-7.5-Q8N-M12G5**
		10 m	**574323**	**NEBU-M12G5-E-10-Q8N-M12G5**
	Angled – angled	0.5 m	**570733**	**NEBU-M12W5-K-0.5-M12W5**
	Straight – angled		**8003617**	**NEBU-M12G5-K-0.5-M12W5**
	Angled – angled	2 m	**570734**	**NEBU-M12W5-K-2-M12W5**
	Straight – angled		**8003618**	**NEBU-M12G5-K-2-M12W5**
Inscription label holder				
	Inscription label holders for EL modules, bag of 10		**547473**	**ASCF-H-E2**

1) Modular product, more information → Internet: neba

Example of a valve terminal VTUG with I-Port interface

Dimensions – Example of a valve terminal with I-Port interface, Size 10

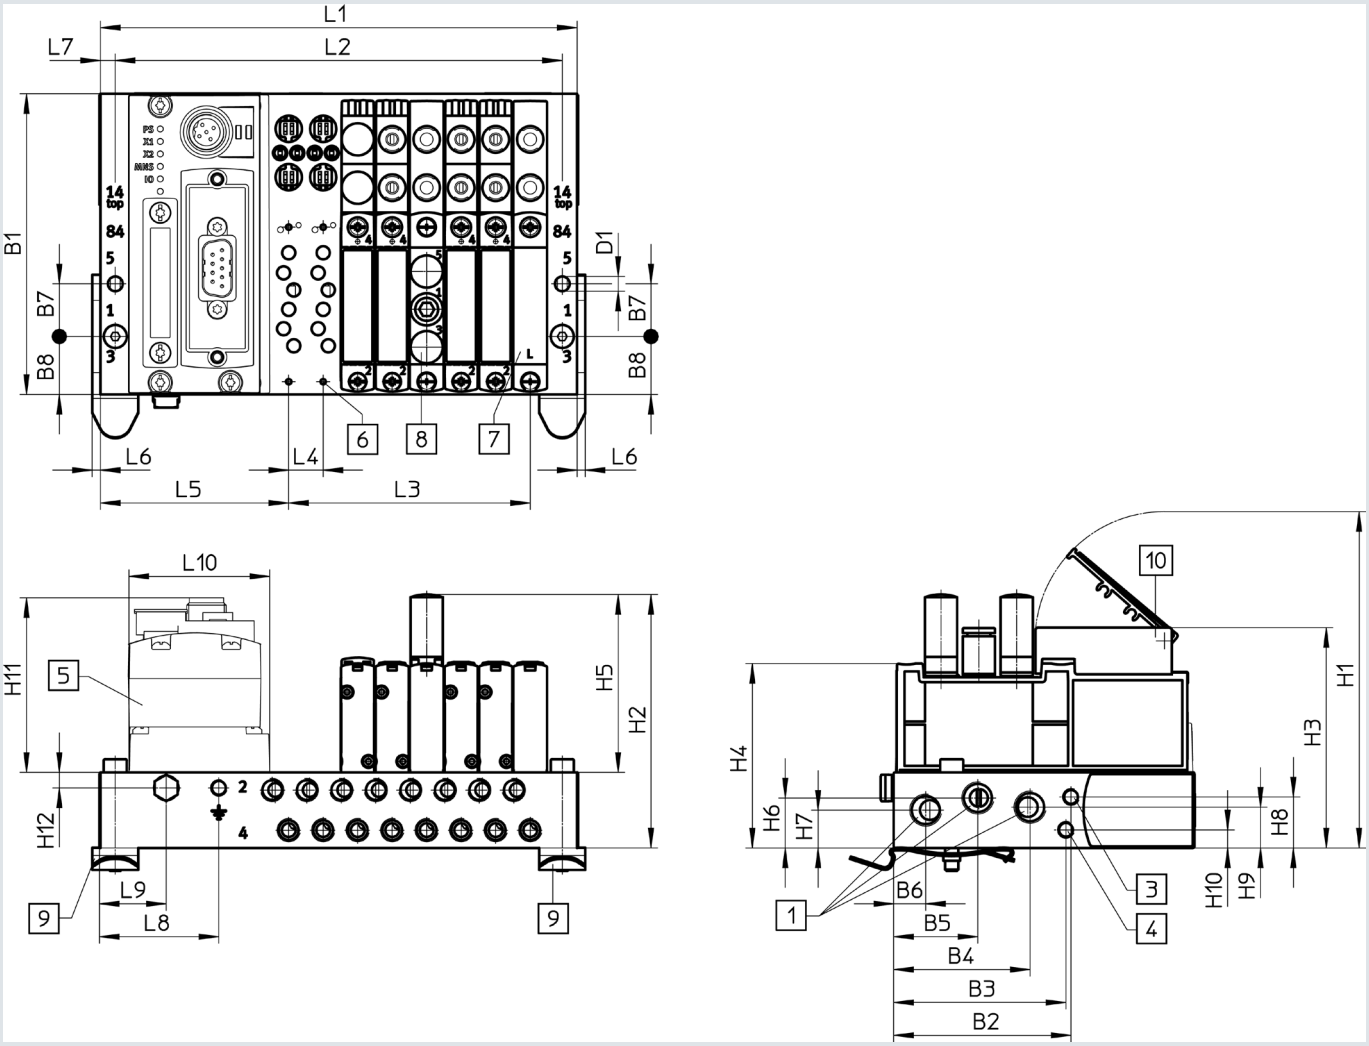Download CAD data ➔ www.festo.com



[1] Ports 1, 3 and 5: G1/8 (at both ends)
[3] Ports 12/14: M5 (at both ends)
[4] Ports 82/84: M5 (at both ends)
[5] CTEU-CANopen
[6] Valves/cover plates/supply plates – mounting on sub-base: M2
[7] Cover plate
[8] Supply plate, ports 1, 3 and 5: M7
[9] DIN rail mounting
[10] Inscription label holder

Example of a valve terminal VTUG with I-Port interface

Type	No. of Valve positions	Size 10																
		B1	B2	B3	B4	B5	B6	B7	B8	D1 ⌀	H1	H2	H3	H4	H5	H6	H7	H8
VABM	4-24	91.5	54	52.4	41.5	25.6	9.8	16	17.7	4.5	102.3	77.1	67	56.1	54.1	15.2	11.5	15.5

Type	No. of Valve positions	Size 10										
		H9	H10	H11	H12	L4	L5	L6	L7	L8	L9	L10
VABM	4-24	12.4	5.5	54.8	4.8	10.5	57.3	2.5	4.5	36	20	42.5

Type	No. of Valve positions	Size 10		
		L1	L2	L3
VABM	4	103	94	31.5
	5	113.5	104.5	42
	6	124	115	52.5
	7	134.5	125.5	63
	8	145	136	73.5
	9	155.5	146.5	84
	10	166	157	94.5
	12	187	178	115.5
	16	229	220	157.5
	20	271	262	199.5
	24	313	304	241.5