
# Pinch valve
# VZQA-C-M22C-15-S5S5-ALV4E-6-E

Part number: 3412425



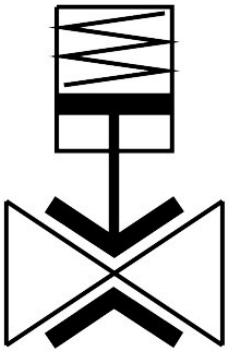

## Data sheet

| Feature | Value |
|---|---|
| Structural design | Pinch valve, pneumatically operated |
| Actuation type | Pneumatic |
| Sealing principle | Soft |
| Mounting position | Any |
| Type of mounting | In-line installation |
| Fitting connection | Clamp according to DIN 32676 series A |
| Nominal width DN | 15 |
| Valve function | 2/2-way, closed, monostable |
| Flow direction | Reversible |
| Medium pressure | 0 MPa...0.6 MPa<br>0 bar...6 bar<br>0 psi...87 psi |
| Note on the medium pressure | Use in the vacuum range was tested up to -0.09 MPa with the air at room temperature. Depending on the application, a counter-vacuum may have to be created on the control side to guarantee the media flow. |
| Operating pressure | 0.35 MPa...0.6 MPa<br>3.5 bar...6 bar<br>50.75 psi...87 psi |
| Nominal pressure of fitting PN | 10 |
| Burst pressure | 1.6 MPa<br>16 bar<br>232 psi |
| Reset method | Mechanical spring |
| Type of control | Externally controlled |
| Auxiliary pilot air port 12 | M5 |
| Pilot medium | Compressed air as per ISO 8573-1:2010 [7:4:1] |
| Medium | Compressed air as per ISO 8573-1:2010 [-:-:1]<br>Water |
| Max. viscosity | 4000 mm²/s |

| Feature | Value |
|---|---|
| Temperature of medium | -5 °C...100 °C |
| Ambient temperature | -5 °C...60 °C |
| Storage temperature | 5 °C...20 °C |
| Flow rate Kv | 5 m³/h |
| On switching time | 150 ms |
| Switching time off | 250 ms |
| Note on materials | RoHS compliant |
| LABS (PWIS) conformity | VDMA24364 Zone III |
| Housing material | Wrought aluminum alloy |
| Housing cover material | high-alloy stainless steel |
| Material no. housing cover | 1.4404 / AISI 316L |
| Seals material | FPM |
| Shut-off element material | EPDM |
| Product weight | 608 g |
| For use in the food industry | See supplementary material information |
| Material of bowl | PA6 |